










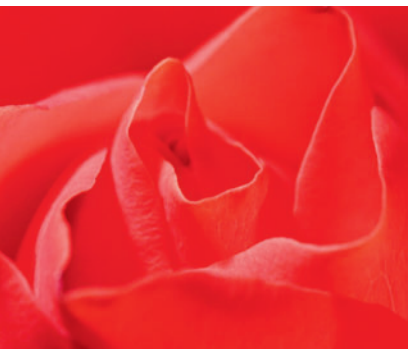


















CALEFFI SOLAR











LIST PRICE FEBRUARY 2011










Item	Code	Description	Pk	Lbs	List Price Ea
SolarPlate™ Flat plate collectors with union half on each connection. * contact factory for lead times.					
	NAS10406	25,000 Btu/day (SRCC Category C) with brass 1" union half soldered on each connection with 1" union thread. 4' x 6.5'	1	90.0	2,400.00
	NA10100	Broken crating charge for NAS10406 collectors			100.00 net
	NAS10408*	32,000 Btu/day (SRCC Category C) with brass 1" union half soldered on each connection with 1-1/4" union thread. 4' x 8'.	1	113.0	2,800.00
	NAS10410*	40,000 Btu/day (SRCC Category C) with brass 1" union half soldered on each connection with 1-1/4" union thread. 4' x 10'.	1	153.0	3,200.00
	NA10126	Broken crating charge for NAS10408 / NAS10410			100.00 net
Flat Plate collector mounting brackets and tilt extensions					
	NAS10001	Universal foot mounts for solar collectors, flush or tilt mount (4 each with hardware)	1	5.0	248.00
	NAS10002	6 foot extension 1" square tube to tilt collectors	1	2.0	124.00
Connection kit to connect 3/4" SolarFlex to flat plate collectors					
	NA12145	Connection kits for 6.5' collectors odd & even includes 2 (R50055) 1" washers, 2 (R61008) 1" nuts, 2 (NA10104) 1" disk and 1 (NA10083) 1" plug	1	2.0	38.45
	NA12146	Connection kits for even number of 8' and 10' collectors includes 3 (R50056) 1-1/4" washer, 2 (R31495) 1-1/4" nut, 2 (R11059) 1-1/4" disk, 1 (NA10087) bushing, 1 (R50055) washer and 1 (R31706) male nipple	1	3.0	95.25
	NA12147	Connection kits for odd number of 8' and 10' collectors includes 3 (R50056) 1-1/4" washer, 2 (R31495) 1-1/4" nut, 2 (R11059) 1-1/4" disk, 2 (NA10087) bushing, 1 (R50055) washer and 1 (NA10116) male 1" thread	1	3.0	129.05
Pre-mixed high temperature propylene glycol 50%					
	NA10103	Pre-mixed high temperature propylene glycol (non-toxic) 50%, FDA reference: 21 CFR 182.1666, Gosselin Toxicity Index 1, Generally recognized as safe for use as direct food additives. 5 gallon bucket	1	45.0	200.00









Item	Code	Description	Pk	Lbs	List Price Ea
Brass fitting for connecting copper pipe to union half on NAS10406 collector headers					
	NA10061	3/4" sweat x 1" male thread connects to 1" union nut half on NAS10406 collector	1	0.2	26.25
	NA10003	3/4" sweat tail piece use with 1" union nut for connecting to NAS10406 connector	1	0.2	13.40
	R61008	Union nut with 1" female thread to attached tail piece to 1" male union half on NAS10406 collector	1	0.2	5.25
	R50055	Washer flat sealing, use with 1" union nut (R61008) (Priced each, sold in package of 10 each)	10	0.1	1.90
	NA10083	1" male threaded plug for collector header female union half, use washer (R50055)	1	0.2	15.75
	NA10104	1" female disk used with 1" nut (R61008) and washer (R50055) to cap collector header male union half	1	0.1	4.20
Brass fitting for connecting copper pipe to union half on NAS10408 & NAS10410 collector headers					
	NA10119	1" sweat x 1-1/4" male thread connects to 1-1/4" union nut half on NAS10408 & NAS10410 collectors	1	0.3	34.65
	NA10042	1" sweat tail piece for use with 1-1/4" union nut for connecting to NAS10408 & NAS10410 collectors	1	0.3	27.30
	R31495	Union nut with 1-1/4" female thread to attach tail piece to 1-1/4" male thread on NAS10408 & NAS10410	1	0.3	8.40
	R50056	Washer flat sealing for 1-1/4" union nut (R31495) (Priced each, sold in package 5 each)	5	0.2	3.05
	NA10236	1-1/4" male threaded plug for collector header female union half, use washer (R50055)	1	0.2	NEW 19.75
	R11059	1-1/4" female disk used with 1-1/4" nut (R31495) and washer (R50056) to cap collector header male union half	1	0.1	5.25
Complete sweat union for 3/4" and 1" collector headers					
	NA12153	3/4" sweat collector header union with (1) 1" union nut (R61008), (1) 3/4" tail (NA10003), (1) washer (R50055) and (1) 3/4" sweat x 1" union male (NA10061)	1	3.0	46.80
	NA12154	1" sweat collector header union with (1) 1" union nut x 1" tail (59834A), (1) washer (R50055) and (1) 1" sweat x 1" union male (NA10062)	1	3.1	51.45
	NA12155	1" sweat collector header union with (1) 1-1/4" union nut (R31495), (1) 1" tail (NA10042), (1) washer (R50056) and (1) 1" sweat x 1-1/4" union male (NA10119)	1	3.5	73.40






Item	Code	Description	Pk	Lbs	List Price Ea
SolarCon™ Storage tanks					
	NAS20050	50 gal tank, without HX, (6) 2" NPT female ports on the sides, (1) 2" NPT female side port, (3) 3/4" NPT top ports	1	200	2,400.00 NEW
	NAS20053	50 gal tank, lower HX coil, 1 temp well, electric element boost	1	231	3,100.00
	NAS20080	80 gal tank, without HX, (6) 2" NPT female ports on the sides, (1) 2" NPT female side port, (3) 3/4" NPT top ports	1	250	2,900.00 NEW
	NAS20083	80 gal tank, lower HX coil, 1 temp well, electric element boost	1	297	4,200.00
	NAS20082	80 gal tank, lower HX coil, 2 temp wells, upper HX coil for boiler boost	1	327	4,700.00
	NAS20120	120 gal tank, without HX, (6) 2" NPT female ports on the sides, (1) 2" NPT side port, (3) 3/4" NPT top ports	1	350	3,800.00 NEW
	NAS20123	120 gal tank, lower HX coil, 1 temp well, electric element boost	1	397	5,000.00
	NAS20122	120 gal tank, lower HX coil, 2 temp wells, upper HX coil for boiler boost	1	427	5,500.00
	NAS20124	120 gal tank, lower HX coil, 2 temp wells, upper HX coil for radiant heating, with electrical boost	1	429	5,700.00
SolarCon™ Storage tank accessories					
	NA10234	3/4" female NPT x 2" male NPT stainless steel bushing for tanks without HX for mounting temperature probe	1	0.4	46.00 NEW
	NA10093	90-degree brass elbow 1" female x 1" male union half for tank HX connection	1	0.5	50.00
	NA3140-02	3/4" SolarFlex with insulation (1) 6 ft long for tank HX connection to bottom solar pump station	1	1.0	180.00
	NA255002	6' flexible stainless steel extension for expansion tank	1	1.0	98.00
	NA267002	Kit to mount solar station onto storage tank. Includes bracket, hardware and 6' extension for expansion tank	1	2.0	120.00
	NA267003	Kit to mount solar station onto storage tank. Includes bracket, hardware.	1	2.0	22.00







Item	Code	Description	Pk	Lbs	List Price Ea
Solar flow meter, sight glass gage 1/2 to 5 gpm or 1 to 10 gpm scale					
	NA255110	Flow meter, 1/2 to 5 gpm scale, 1" male union threads - order fitting kit separately below	1	2.9	133.00
	NA255112	Flow meter, 1 to 10 gpm scale, 1" male union threads - order fitting kit separately below	1	2.9	153.00
Solar balancing valve with flow meter, sight glass gage 1/2 to 5 gpm or 1 to 10 gpm scale					
	NA255111	Balancing valve with flow meter, 1/2 to 5 gpm scale, 1" male union threads - order fitting kit separately below	1	30.0	155.50
	NA255113	Balancing valve with flow meter, 1 to 10 gpm scale, 1" male union threads - order fitting kit separately below	1	3.0	175.50
Fittings kits to thread onto 1" male union thread					
	NA12240	1/2" NPT union connection set to 1" M thread includes 2 (R61008) 1" union nut, 2 (R50055) 1" washer and 2 (31548 FD) 1/2" male NPT tail piece	1	0.2	39.50
	NA12249	1/2" Sweat union connection set to 1" M thread includes 2 (R61008) 1" nut, 2 (R50055) 1" washer and 2 (NA10002) 1/2" sweat tail piece	1	0.2	37.40
	NA12250	3/4" NPT union connection set to 1" M thread includes 2 (R61008) 1" nut, 2 (R50055) 1" washer and 2 (31901A) 3/4" male NPT tail piece	1	0.2	43.20
	NA12259	3/4" Sweat union connection set to 1" M thread includes 2 (R61008) 1" nut, 2 (R50055) 1" washer and 2 (NA10003) 3/4" sweat tail piece	1	0.2	41.10
	NA12260	1" NPT union connection set to 1" M thread includes 2 (59817A) 1" nut with 1" male NPT tail piece and, 2 (R50055) 1" washer	1	0.3	52.50
	NA12269	1" Sweat union connection set to 1" M thread includes 2 (59834A) 1" nut with 1" sweat tail piece and, 2 (R50055) 1" washer	1	0.3	50.40
Balancing valve with flow meter, sight glass gage from 1/2 to 32 gpm with insulation					
	132432A	Balancing Valve with flow meter 1/2" NPT 1/2 to 1-3/4 gpm.	1	1.7	214.50
	132552A	Balancing Valve with flow meter 3/4" NPT 2 to 7 gpm.	1	1.6	231.00
	132662A	Balancing Valve with flow meter 1" NPT 3 to 10 gpm.	1	2.1	269.50
	132772A	Balancing Valve with flow meter 1-1/4" NPT 5 to 19 gpm.	1	2.6	357.50
	132882A	Balancing Valve with Flow meter 1-1/2" NPT 8 to 32 gpm.	1	3.2	423.50
Inline union sweat solar flow check valves					
	NA51059	3/4" sweat union in-line flow check valve with mesh screen to catch debris, union halves for easy connection and service. Up to 250°F, 12 Cv, 1/2 PSI crack pressure, up to 50% glycol.	1	3.0	68.20
	NA51069	1" sweat union in-line flow check valve with mesh screen to catch debris, union halves for easy connection and service. Up to 250°F, 17 Cv, 1/2 PSI crack pressure, up to 50% glycol.	1	3.5	86.30







NEW

Item	Code	Description	Pk	Lbs	List Price Ea
Solar pump stations without fittings (3/4" female metric thread, select adaptors below)					
	255050A	Dual-line solar pump station return & flow, Three-speed without fittings (select fittings kit below)	1	17.0	1,200.00
	255056A	Dual-line solar station return & flow, without pump & fittings (select fittings kit below and pump)	1	12.0	950.00
	256050A	Single-line solar pump station return only, Three-speed without fittings (select fittings kit below)	1	14.0	1,045.00
	256056A	Single-line solar pump station return only, without pump & fittings (select fittings kit below and pump)	1	10.0	795.00
Solar pump stations fitting kits to connect SolarFlex™ directly (mix & match on top & bottom)					
	NA26640	1/2" SolarFlex direct fitting kit includes (2) 3/4" male thread adaptors (NA12152)	1	0.6	54.00
	NA26740	1/2" SolarFlex direct fitting kit includes (4) 3/4" male thread adaptors (NA12152)	1	1.0	108.00
	NA26650	3/4" SolarFlex direct fitting kit includes (2) 1" male thread adaptors (NA12162)	1	0.6	58.30
	NA26750	3/4" SolarFlex direct fitting kit includes (4) 1" male thread adaptors (NA12162)	1	1.0	116.60
	NA26660	1" SolarFlex direct fitting kit includes (2) 1-1/4" male thread adaptors (NA12162 + NA10087 + R50055)	1	0.6	112.90
	NA26760	1" SolarFlex direct fitting kit includes (4) 1-1/4" male thread adaptors (NA12162 + NA10087 + R50055)	1	1.0	225.80
Solar pump stations fitting kits to connect copper pipe with union nuts (mix & match on top & bottom)					
	NA26649	1/2" Sweat fitting kit includes (2) 3/4" male adaptors (NA12152), (2) nuts (R41298), (2) 1/2" sweat tail (NA10001) and (2) washers (R50058).	1	0.6	88.70
	NA26749	1/2" Sweat fitting kit includes (4) 3/4" male adaptors (NA12152), (4) nuts (R41298), (4) 1/2" sweat tail (NA10001) and (4) washers (R50058).	1	1.0	177.40
	NA26659	3/4" Sweat fitting kit includes (2) 1" male adaptors (NA12162), (2) nuts R61008), (2) 3/4" sweat tail (NA10003) and (2) washers (R50055).	1	0.6	99.40
	NA26759	3/4" Sweat fitting kit includes (4) 1" male adaptors (NA12162), (4) nuts R61008), (4) 3/4" sweat tail (NA10003) and (4) washers (R50055).	1	1.0	198.80
	NA26669	1" Sweat fitting kit includes (2) 1" male adaptors (NA12162), (2) 1" sweat tail with nut (59834A) and (2) washers (R50055).	1	0.6	108.70
	NA26769	1" Sweat fitting kit includes (4) 1" male adaptors (NA12162), (4) 1" sweat tail with nut (59834A) and (4) washers (R50055).	1	1.0	217.40
Solar pump stations fitting kits to connect NPT pipe male with union nuts (mix & match on top & bottom)					
	NA26656	3/4" NPT fitting kit includes (2) 1" male adaptors (NA12162), (2) nuts (R61008), (2) 3/4" NPT tail (31901A) and (2) washers (R50055).	1	0.6	101.50
	NA26756	3/4" NPT fitting kit includes (4) 1" male adaptors (NA12162), (4) nuts (R61008), (4) 3/4" NPT tail (31901A) and (4) washers (R50055).	1	1.0	203.00

Item	Code	Description	Pk	Lbs	List Price Ea
High head/ flow - Dual-line solar pump stations with return and flow					
	NA255160	Dual-line solar pump station return & flow, Three-speed Wilo Star 30 pump, 30 ft of head with flow meter adjustment from 1 to 10 gpm. Return and flow with 1" male union half threads. Max.1.5 Amps on high speed. Select two kits from below, one kit for the top and one kit for the bottom, mix and match.	1	25.0	2,000.00
Solar pump stations fitting kits to connect SolarFlex™ directly (mix & match for top & bottom)					
	NA15550	3/4" NPT male union kit for NA255160 station includes 2 (NA10087) 1-1/4" bushing, 2 (R50055) 1" washer, 2 (R31495) 1-1/4" nut, 2 (R50056) 1-1/4" washer and 2 (NA10113) 3/4" NPT male tail piece	1	1.0	157.30
	NA15559	3/4" Sweat union kit for NA255160 station includes 2 (NA10087) 1-1/4" bushing, 2 (R50055) 1" washer, 2 (R31495) 1-1/4" nut, 2 (R50056) 1-1/4" washer and 2 (31390 FD) 3/4" sweat tail piece	1	1.0	130.00
	NA15560	1" NPT male union kit for NA255160 station includes 2 (NA10087) 1-1/4" bushing, 2 (R50055) 1" washer, 2 (R31495) 1-1/4" nut, 2 (R50056) 1-1/4" washer and 2 (NA10116) 1" NPT male tail piece	1	1.1	157.30
	NA15569	1" Sweat union kit for NA255160 station includes 2 (NA10087) 1-1/4" bushing, 2 (R50055) 1" washer, 2 (R31495) 1-1/4" nut, 2 (R50056) 1-1/4" washer and 2 (NA10042) 1" sweat tail piece	1	1.1	132.10
	NA15570	1-1/4" male union thread kit for NA255160 station includes 2 (NA10087) 1-1/4" bushing, 2 (R50055) 1" washer	1	0.9	54.60
Replacement pumps for solar pump stations 255 & 256					
	NA12170	Wilo Star S16 - 3 speed 120V, 16 ft of head with flows up to 14 gpm, 1" male union threads	1	5.0	315.00
	NA12169	Wilo Star S30 - 3 speed 120V, 30 ft of head with flows up to 30 gpm, 1½" male union threads	1	6.0	NEW 500.00
	NA12168	Wilo Star S21 - 3 speed 120V, 21 ft of head with flows up to 14 gpm, 1" male union threads	1	5.0	315.00
	NA26711	DC Strong - 8 to 24VDC, 15 ft of head / 7gpm at 24VDC or 8 ft of head / 4 gpm at 12VDC, 1" male union threads	1	3.0	690.00
Accessories for solar pump stations 255 & 256					
	538402 FD	Fill and drain valve 1/2" NPT x 3/4" Garden Hose Thread	1	0.1	16.50
	NA10082	1/2" NPT female x 3/4" NPT male thread reducer bushing	1	0.1	7.35
	NA256011	Dual fill and flush valve 1" male union thread x 3/4" GHT	1	0.8	210.00
	NA256012	Two solar station connection kit for 255 & 256	1	1.0	300.00
	R21180	3/4" female cap for plugging tank connection on pump station while leak testing. Requires (R50058) washer	1	0.1	6.00
	255010A	Manual hand pump for pressurizing system by attaching to solar pump stations	1	3.0	320.00

Item	Code	Description	Pk	Lbs	List Price Ea
Replacement gauges for solar pump stations					
	NA10130	2½ red dial temperature gauge 32-320° F, stem 0.275 dia. (7mm) for NA255160 solar pump stations	1	0.1	45.80
	NA10131	2½ blue dial temperature gauge 32-320° F, stem 0.275 dia. (7mm) for NA255160 solar pump stations	1	0.1	45.80
	NA12156	1½ dial pressure gauge 0-90 PSI, ¼" rear connection for all solar pump stations	1	0.1	46.50
	NA255003	1½ red dial temperature gauge 32-320° F, stem 0.275 dia. (7mm) for 255 and 256 solar pump stations	1	0.1	48.10
	NA255004	1½ blue dial temperature gauge 32-320° F, stem 0.275 dia. (7mm) for 255 and 256 solar pump stations	1	0.1	48.10
Fittings kits to thread onto 1" male union thread (use with diverting valve below)					
	NA12340	1/2" NPT union connection set to 1" M thread includes 3 (R61008) 1" union nut, 3 (R50055) 1" washer and 3 (31548 FD) 1/2" male NPT tail piece	1	0.2	59.25
	NA12349	1/2" Sweat union connection set to 1" M thread includes 3 (R61008) 1" nut, 3 (R50055) 1" washer and 3 (NA10002) 1/2" sweat tail piece	1	0.2	56.10
	NA12350	3/4" NPT union connection set to 1" M thread includes 3 (R61008) 1" nut, 3 (R50055) 1" washer and 3 (31901A) 3/4" male NPT tail piece	1	0.2	64.80
	NA12359	3/4" Sweat union connection set to 1" M thread includes 3 (R61008) 1" nut, 3 (R50055) 1" washer and 3 (NA10003) 3/4" sweat tail piece	1	0.2	61.65
	NA12360	1" NPT union connection set to 1" M thread includes 3 (59817A) 1" nut with 1" male NPT tail piece and, 3 (R50055) 1" washer	1	0.3	78.75
	NA12369	1" Sweat union connection set to 1" M thread includes 3 (59834A) 1" nut with 1" sweat tail piece and, 3 (R50055) 1" washer	1	0.3	75.60
Diverting three-way valve solar pump station mounting kit (select fitting above)					
	NA26710	Used for diverting solar fluid to another storage tank, swimming pool heat exchanger or heat shedding device. Three-way diverting kit with 120V actuator (Z126000) and valve body (Z300667) with 1" male union threads. Bottom AB port connects to elbow, B port connects to first storage HX and port A connects to second storage HX. Elbow (NAL6363) with 1" union nut to mount on the return bottom inlet of the solar pump station below the flow meter. Tee (NAT636262) with 1" union nut mounts on the bottom flow side of the solar pump station below the air spererator. The flow through port connects to the first store and the branch of the Tee connects to the second store. The cord (NA10092) connects valve to iSolar controller mounted in the foam cover of solar pump stations. Direct connects to 3/4" SolarFlex or any of the union fitting above.	1	6.0	309.65






Item	Code	Description	Pk	Lbs	List Price Ea
Solar expansion tanks					
 	255007	Stainless steel flexible tank connection kit 3/4" straight thread double check valve, wall bracket and hardware for hanging expansion tanks.	1	3.0	184.80
	259012	Expansion tank 3 gallons, 250°F system temp., 3/4" straight thread connects into check valve of connection kit above or select 1/2" connection kit below	1	14.0	141.75
	259018	Expansion tank 5 gallons, 250°F system temp., 3/4" straight thread connects into check valve of connection kit above or select 1/2" connection kit below	1	17.4	176.40
	259024	Expansion tank 7 gallons, 250°F system temp., 3/4" straight thread connects into check valve of connection kit above or select 1/2" connection kit below	1	21.3	226.80
	259035	Expansion tank 9 gallons, 250°F system temp., 3/4" straight thread connects into check valve of connection kit above or select 1/2" connection kit below	1	24.3	386.40
	259050	Expansion tank 13 gallons, 250°F system temp., 3/4" straight thread connects into check valve of connection kit above or select 1/2" connection kit below	1	27.6	487.20
	NA25540	1/2" NPT union connection set (1) to 3/4" M thread of expansion tanks, (1) R31868, (1) R41298, (1) R50058	1	0.1	18.40
	NA25549	1/2" sweat union connection set (1) to 3/4" M thread of expansion tanks, (1) NA10001, (1) R41298, (1) R50058	1	0.1	17.35
Normally Closed valve actuators, power open - spring close (select matching valve body from below)					
	Z121000	24VAC without microswitch (requires external relay) Normally closed, snaps onto valve bodies below.	1	1.1	120.00
	Z111000	24VAC with microswitch (requires external relay) Normally closed, snaps onto valve bodies below.	1	1.1	129.50
	Z126000	120V without microswitch (connect directly to 120V iSolar relay) NC, snaps onto valve bodies below.	1	1.1	120.00
	Z116000	120V with microswitch (connect directly to 120V iSolar relay) NC, snaps onto valve bodies below.	1	1.1	129.50
Diverting three-way valve bodies rated at 240° F (select matching actuator from above)					
 	Z300537	3-way diverting valve with 3/4" sweat connections with 7.5 Cv for flows up to 20 gpm.	1	1.1	87.40
	Z307537	3-way diverting valve with 3/4" sweat connections with 7.5 Cv for flows up to 20 gpm, Low Lead for Potable water , use to divert to tankless water heater	1	1.1	108.40
	Z300637	3-way diverting valve with 1" sweat connections with 7.5 Cv for flows up to 20 gpm.	1	1.2	131.90
	Z300737	3-way diverting valve with 1-1/4" sweat connections with 7.5 Cv for flows up to 30 gpm	1	1.2	160.20
	Z300667	3-way diverting valve with 1" male union half thread connections with flows up to 20 gpm (3/4" SolarFlex)	1	1.2	99.70

Item	Code	Description	Pk	Lbs	List Price Ea
Automatic air vents and air separator					
	250041A	Automatic air vent 1/2" NPT male, 360° F rated	1	0.3	72.45
	NA29284	Shut-off air vent valve 1/2" NPT M x F, 360° F rated	1	0.2	59.00
	NA10204	Vent cap adaptor 1/4" NPT M used to connect discharge tube. Fits all air vents and air separators.	1	0.1	NEW 24.00
	251004A	Automatic high discharge air vent 1/2" NPT female, 320° F	1	0.8	135.00
	251003A	Micro-bubbles air separator 3/4" NPT, 320° F rated	1	2.0	189.00
Safety relief valves with 1/2" female inlet and 3/4" female discharge					
	253042	Safety relief valve factory set to 35 psi, 1/2" F x 3/4" F	1	0.3	72.50
	253043	Safety relief valve factory set to 45 psi, 1/2" F x 3/4" F	1	0.3	72.50
	253044	Safety relief valve factory set to 60 psi, 1/2" F x 3/4" F	1	0.3	72.50
	253046	Safety relief valve factory set to 90 psi, 1/2" F x 3/4" F	1	0.3	72.50
	253048	Safety relief valve factory set to 120 psi, 1/2" F x 3/4" F	1	0.3	72.50
	253040	Safety relief valve factory set to 150 psi, 1/2" F x 3/4" F	1	0.3	72.50
Thermostatic three-way mixing valve 3.0 Cv, 200°F inlet temp. ASSE 1017 Low Lead					
	252149A	1/2" Sweat 3-way mixing valve with built-in check valves. Low-Lead Brass	1	1.0	235.80
	252159A	3/4" Sweat 3-way mixing valve with built-in check valves. Low-Lead Brass	1	1.0	248.25
	252169A	1" Sweat 3-way mixing valve with built-in check valves. Low-Lead Brass	1	1.0	286.40
	252158A	3/4" Sweat 3-way mixing valve with built-in check valves with adaptor and gauge. Low-Lead Brass	1	1.2	304.85
	252168A	1" Sweat 3-way mixing valve with built-in check valves with adaptor and gauge. Low-Lead Brass	1	1.2	340.10
Three way mixing valve fittings. ASSE 1017 Low Lead					
	NA10164	1/2" Sweat tailpiece with built-in check valve Low-Lead Brass for 252, 521, 5213	1	0.2	29.40
	NA10165	3/4" Sweat tailpiece with built-in check valve Low-Lead Brass for 252, 521, 5213	1	0.3	34.70
	NA10166	1/2" Sweat tailpiece with built-in check valve Low-Lead Brass for 252, 521, 5213	1	0.4	56.70
Three way mixed temperature gauge fitting assembly. ASSE 1017 Low Lead					
	NA10056	3/4" Mixed temp. gauge sweat fitting assembly	1	0.2	73.50
	NA10058	1" Mixed temp. gauge sweat fitting assembly	1	0.2	80.80
High flow thermostatic mixing valve 4.8 Cv, 200°F inlet temp. ASSE 1017					
	523058A	3-Way Thermostatic Mixing Valve 3/4" Sweat, 4.8 Cv	1	5.0	771.60
	523066A	3-Way Thermostatic Mixing Valve 1" Sweat, 4.8 Cv	1	5.0	815.10

Item	Code	Description	Pk	Lbs	List Price Ea
SolarFlex™ stainless steel piping with EPDM insulation					
	NA3520-15	1/2" SolarFlex pipe 50' coil including (2) double nipples (NA12122), (4) union nuts (R41298), 4 segment rings (NA12112) and 4 washers (R50058), UV resistant jacket	1	24.0	1,500.00
	NA3540-15	3/4" SolarFlex pipe 50' coil including (2) double nipples (NA12123), (4) union nuts (R61008), 4 segment rings (NA12113) and 4 washers (R50055), UV resistant jacket	1	27.0	1,700.00
	NA3560-15	1" SolarFlex pipe 50' coil including (2) double nipples (NA12124), (4) union nuts (R31495), 4 segment rings (NA12114) and 4 washers (R50056), UV resistant jacket	1	40.0	2,300.00
	NA3540-B	3/4" SolarFlex pipe with UV resistant jacket, bulk lengths (up to 165' per spool) price per foot (minimum 10'), without connection fittings 1 (NA12103) & 2 (NA12123)	1	0.5	28.60
SolarFlex™ extra connection kits					
	NA12102	Connection Kit for 1/2" SolarFlex with (4) union nuts (R41298), 4 segment rings (NA12112) and 4 washers (R50058)	1	1.0	36.80
	NA12103	Connection Kit for 3/4" SolarFlex with (4) union nuts (R61008), 4 segment rings (NA12113) and 4 washers (R50055)	1	1.1	49.60
	NA12104	Connection Kit for 1" SolarFlex with (4) union nuts (R31495), 4 segment rings (NA12114) and 4 washers (R50056)	1	1.3	79.40
SolarFlex™ pipe hangers					
	NA12132	Pipe hangers for 1/2" SolarFlex (<i>priced per package of 4</i>)	1	1.2	45.90
	NA12133	Pipe hangers pack of 4 hangers for 3/4" SolarFlex	1	1.3	48.30
	NA12134	Pipe hangers pack of 4 hangers for 1" SolarFlex	1	1.4	54.35
SolarFlex™ insulating tape					
	NA35001	Insulating EPDM foam tape (UV resistant) to wrap exposed piping, 25 ft roll x 2" wide x 1/8" thick	1	1.3	88.70
	NA35002	Black film tape (UV resistant) to wrap foam tape, 30 ft roll x 2" wide	1	0.5	18.90
	NA35007	Black braid sleeve (UV & Vermin resistant), to protect exposed split piping outside, (2) 4' braid with (1) 30 ft roll x 2" wide black film tape	1	1.0	75.10
SolarFlex™ sliding piston flattening tool					
	NA35003	Sliding piston tool to flatten SolarFlex after cutting (requires separate jaw for each size of SolarFlex)	1	5.0	300.00
	NA35004	1/2" SolarFlex jaw which mounts on sliding piston	1	3.0	565.00
	NA35005	3/4" SolarFlex jaw which mounts on sliding piston	1	3.0	565.00
	NA35006	1" SolarFlex jaw which mounts on sliding piston	1	3.0	565.00




Item	Code	Description	Pk	Lbs	List Price Ea
1/2" SolarFlex™ pipe requires 3/4" thread fittings					
	NA12122	Double nipple for 1/2" SolarFlex with 3/4" x 3/4" male	1	0.3	25.20
	NA12172	3/4" NPT Double nipple for use with 1/2" SolarFlex	1	0.3	25.20
	R41298	Union nut for 1/2" SolarFlex with 3/4" female thread	1	0.1	4.20
	NA12112	Segment C ring for 1/2" SolarFlex	1	0.1	3.40
	R50058	Washer flat sealing for 1/2" SolarFlex	1	0.1	1.60
	NA10001	1/2" sweat tail piece, use union nut and double nipple	1	0.3	11.55
	NA10118	3/4" sweat to 1/2" SolarFlex with 3/4" male thread	1	0.3	25.20
	NA12152	3/4" male with o-ring x 3/4" male thread for 1/2" SolarFlex	1	0.3	27.00
	NA10095	22mm smooth pipe to 1/2" SolarFlex w/ 3/4" male thread	1	0.3	23.10
	254455	15mm compression to 1/2" SolarFlex w/ 3/4" male thread	1	0.1	29.40
	254452	22mm compression to 1/2" SolarFlex w/ 3/4" male thread	1	0.2	29.40
	254755	15mm compression elbow to 1/2" SolarFlex w/ 3/4" male	1	0.1	33.60
	254752	22mm compression elbow to 1/2" SolarFlex w/ 3/4" male	1	0.2	33.60
3/4" SolarFlex™ pipe requires 1" thread fittings					
	NA12123	Double nipple for 3/4" SolarFlex with 1" x 1" male thread	1	0.4	31.50
	NA12173	1" NPT Double nipple for use with 3/4" SolarFlex	1	0.4	31.50
	R61008	Union nut for 3/4" SolarFlex with 1" female thread	1	0.2	5.25
	NA12113	Segment C ring 3/4" SolarFlex	1	0.1	5.25
	R50055	Washer flat sealing for 3/4" Solar Flex	1	0.1	1.90
	NA10002	1/2" sweat tail piece for use with 1" union nut	1	0.3	11.55
	NA10003	3/4" sweat tail piece for use with 1" union nut	1	0.4	13.40
	31901A	3/4" NPT tail piece for 1" union nut	1	0.1	14.45
	59834A	1" sweat tail piece with built-in 1" union nut	1	0.5	23.30

Item	Code	Description	Pk	Lbs	List Price Ea
3/4" SolarFlex™ pipe requires 1" thread fittings					
	NA10060	3/4" NPT female to 3/4" SolarFlex with 1" male thread	1	0.3	25.20
	NA10061	3/4" sweat adaptor to 3/4" SolarFlex with 1" male thread	1	0.2	26.25
	NA10062	1" sweat adaptor to 3/4" SolarFlex with 1" male thread	1	0.2	27.30
	NA10064	1" NPT male to 3/4" SolarFlex with 1" male thread	1	0.2	28.35
	NA12162	3/4" male with o-ring x 1" male thread for 3/4" SolarFlex	1	0.2	29.15
	NA10089	3/4" female thread x 1" male union thread bushing	1	0.1	21.00
	NA10085	22mm smooth pipe to 3/4" SolarFlex with 1" male thread	1	0.2	24.15
	254465	15mm compression to 3/4" SolarFlex with 1" male thread	1	0.3	34.65
	254462	22mm compression to 3/4" SolarFlex with 1" male thread	1	0.3	34.65
	NA254715	15mm compression elbow to 3/4" SolarFlex with 1" male	1	0.4	39.90
	NA254712	22mm compression elbow to 3/4" SolarFlex with 1" male	1	0.4	39.90
1" SolarFlex™ pipe requires 1-1/4" union thread fittings					
	NA12124	Double nipple for 1" SolarFlex with 1-1/4"x 1-1/4" thread	1	0.4	50.40
	R31495	Union nut 1-1/4" for 1" SolarFlex with 1-1/4" female thread	1	0.2	8.40
	NA12114	Segment C ring for 1" SolarFlex	1	0.1	8.40
	R50056	Washer flat sealing for 1" SolarFlex	1	0.1	3.05
	31390 FD	3/4" sweat tail piece for use with 1-1/4" union nut	1	0.2	26.25
	NA10042	1" sweat tail piece for use with 1-1/4" union nut	1	0.3	27.30
	NA10116	1" NPT Male fitting for use with 1-1/4" union nut	1	0.2	39.90
	NA10119	1" sweat adaptor x 1-1/4" male union thread	1	0.4	34.65
	NA10087	1" union thread female x 1-1/4" male union thread bushing	1	0.4	25.40
	61215A	1" NPT female x 1-1/4" male union thread bushing	1	0.8	25.20
	R31706	1" male x 1-1/4" male nipple for 3/4" to 1" SolarFlex	1	0.3	31.50

Item	Code	Description	Pk	Lbs	List Price Ea
iSolar™ intelligent 120VAC Delta T controllers with Data connection					
	257220A	iSolar 2 has 1 arrangement for Delta T control with 1 pump speed control triac, includes 2 temp. sensors and data connection	1	2.0	475.00
	257240A	iSolar 4 has 2 arrangements for Delta T control with 1 pump speed triac and 1 speed control relay for thermostatic control of second pump or valve, includes 3 sensors with data connection	1	2.0	550.00
	257260A	iSolar Plus V has 10 arrangements for Delta T control with 1 pump speed triac and several options for second speed control relay for pump or valve, includes 4 sensors with data connection. Functions include drain back, heat dump, parallel relay and more.	1	2.0	725.00
Steel electrical mounting box with cover for iSolar controllers					
	NA10120	Cover plate with holes and cutouts for power connection into electrical box with 1/2" and 3/4" concentric KO's for use with a wide variety of wiring methods. Electrical box is 1-5/8" deep x 8-5/8" tall x 4-1/2" wide. UL listed..	1	3.0	70.00
iSolar™ BX intelligent 120VAC Delta T controller with Data connection					
	257270A	iSolar BX with 4 output relays; 3 pump speed triac and 1 standard relay. 7 sensor inputs including 2 for Grundfos Direct Sensors and 1 for rotary pulse flow meters listed on page 15. SD memory card slot for data logging, plus VBus data connection. Kit includes 4 temperature sensors. Functions include ΔT control, pump speed control, energy measurement, operating hours counter, tube collector function, thermostat function, tank loading in layers, priority logic, drainback option, booster function and heat dump function.	1	3.0	800.00
	NA15028	VFS and RPS sensor wire 10' to connect to iSolar BX.	1	0.2	25.00
Steel electrical mounting box with cover for iSolar BX controller					
	NA15027	Cover plate with holes and cutouts for power connection into electrical box with 1/2" and 3/4" concentric KO's for use with a wide variety of wiring methods. Electrical box is 2-1/2" deep x 8" tall x 8" wide. UL listed..	1	5.0	80.00
iSolar™ DL2 intelligent Web Enabled Datalogger to connect to Delta T controllers					
	257201A	iSolar DL 2 Datalogger enables the acquisition and storage of large amounts of data over a long period of time when connected to an iSolar controllers and iSolar WMZ heat energy meters through data connection. DL2 connects to network for internet access of real-time data and stored data. Built-in 180 MB internal memory with integrated SD slot to copy stored data, can be configured and viewed with any standard internet browser via its integrated web interface.	1	2.0	975.00

Item	Code	Description	Pk	Lbs	List Price Ea
iSolar™ WMZ-G1 intelligent kWh (Btu) heat meter with Data connection					
	257202A G1	iSolar WMZ G1 kWh (Btu) heat meter with data connection to DL2 Datalogger. Daisy chain up to (9) WMZ together. Select (1) Grundfos flow / temp sensor, (1) Grundfos pressure / temp. sensor, (2) sensor cables	1	2.0	595.00
	NA15010	RPS Grundfos Direct Sensor Pressure / temp sensor 0 - 150 psi / up to 250° F, ½" male NPT thread.	1	0.3	NEW 175.00
	NA15014	RPS Grundfos Direct Sensor Pressure / temp sensor 0 - 150 psi / up to 250° F, Brass in-line body with 1" male union threads. Select fitting on page 5.	1	0.6	215.00
	NA15015	VFS 1-12 Grundfos Direct Sensor Flow / temp sensor ¼ - 3 gpm / up to 250° F, 1" male union threads. Select fitting on page 5.	1	0.6	265.00
	NA15016	VFS 2-40 Grundfos Direct Sensor Flow / temp sensor ½ - 10 gpm / up to 250° F, Brass body with 1" male union threads. Select fittings on page 5.	1	0.6	295.00
	NA15017	VFS 5-100 Grundfos Direct Sensor Flow / temp sensor 1½ - 15 gpm, 250° F, Stainless steel body with 1" male union threads. Select fitting on page 5.	1	1.6	515.00
	NA15018	VFS 10-200 Grundfos Direct Sensor Flow / temp sensor 2½ - 25 gpm, 250° F, Composite body with 1" sweat union fitting included.	1	1.7	NEW 725.00
	NA15019	VFS 20-400 Grundfos Direct Sensor Flow / temp sensor 5 - 50 gpm, 250° F, Composite body with 1¼" sweat union fitting included.	1	3.8	925.00
	NA15030	VFS and RPS sensor wire 10' to connect to WMZ-G1.	1	0.1	NEW 25.00
iSolar™ WMZ intelligent kWh (Btu) energy heat meter with Data connection					
	257202A	iSolar WMZ kWh (Btu) energy heat meter with data connection to DL2 Datalogger with up to 9 meters. Requires rotary pulse flow meter plus supply and return temperature sensors.	1	2.0	595.00
	NA79701	Rotary pulse flow meter measures liquid flow for energy heat metering production or consumption, 1 pulse = ¼ gal, flow ¼ - 10 gpm, Max 20 gpm, 250°F, Includes ¾" sweat union fittings.	1	3.0	650.00
	NA79702	Rotary pulse flow meter measures liquid flow for energy heat metering production or consumption, 1 pulse = ½ gal, flow ½ - 15 gpm, Max 30 gpm, 250°F, Includes 1" sweat union fittings.	1	5.0	NEW 1,150.00
	NA79703	Rotary pulse flow meter measures liquid flow for energy heat metering production or consumption, 1 pulse = 2½ gal, flow ½ - 25 gpm, Max 50 gpm, 250°F, Includes 1¼" sweat union fittings.	1	8.0	1,350.00
	NA79704	Rotary pulse flow meter measures liquid flow for energy heat metering production or consumption, 1 pulse = 2½ gal, flow 1 - 45 gpm, Max 90 gpm, 250°F, Includes 1½" sweat union fittings.	1	14.0	NEW 1,650.00
	NA79705	Rotary pulse flow meter measures liquid flow for energy heat metering production or consumption, 1 pulse = 2½ gal, flow 1½ - 65 gpm, Max 130 gpm, 250°F, Includes 2" NPT union fittings.	1	17.0	NEW 2,380.00

Item	Code	Description	Pk	Lbs	List Price Ea
iSolar™ Delta T sensors and accessories					
	257205	FKP6 collector Pt1000 sensor with 5' black UV cable, Platinum RTD type, 1000 Ohm, -58 – 355°F, ¼" Ø O.D.	1	0.2	59.00
	257206	FRP6 storage tank Pt1000 sensor with 8' gray cable, Platinum RTD type, 1000 Ohm, 15 – 200°F, ¼" Ø O.D.	1	0.2	55.00
	257207	FKP9 collector screw mount sensor with 5' black UV cable, Platinum RTD type, 1000 Ohm, -58 – 355°F.	1	0.2	89.00
	257208	Replacement Fuse T4A (<i>priced per package of 10</i>)	1	0.1	30.00
	NA10090	Sensor well with 1/2" NPT male thread, ¼" Ø I.D.	1	0.5	34.65
	NA15029	Sensor well with 3/4" NPT male thread, ¼" Ø I.D. <i>Replaces NA257209</i>	1	0.5	42.00
	NA10092	18" SJ round cord, stripped and pre-tinned for connecting pump or valve to controller	1	0.3	9.00
	NA605010	Transformer, Wall 120 VAC to 24 VAC	1	1.0	43.50
	NA15006	Lightning protector SP10 device should be used to protect the sensitive collector temperature sensor against external over-voltages. In the case of thunderstorms, lightning strikes can destroy the collector sensor and differential temperature controller.	1	0.2	70.00
	NA15008	Smart Display SD3 to VBus data interface is used for visualizing data from the solar controller: collector temperature, storage temperature and total energy produced are displayed to the bright LEDs.	1	2.0	650.00
	NA15009	Alarm Module AM1 to VBus data interface is used to signal system failures to a red Flash-LED optical signal and a dry contact output relay, which can be connected to an additional signaling device or to a building management system.	1	0.2	220.00
	NA15020	USB to VBus data interface to connect controller to PC for transmission of system data for processing, visualizing and archiving. A full version of ServiceCenter software is included.	1	0.3	230.00
	NA15021	PWM or 0-10 vdc to VBus data interface is used for speed control of a pump. Information from the controller is converted into a PWM or 0 - 10 vdc output control signal to connection to input control signal of a pump.	1	0.3	260.00
	NA15022	LAN socket to VBus data interface to connect controller to PC network or router for transmission of system data for processing, visualizing and archiving over a local network. Full version of ServiceCenter software included.	1	0.3	300.00

Item	Code	Description	Pk	Lbs	List Price Ea
Brass fittings* contact factory for additional configurations					
	NAL5263	Elbow 3/4" Male union thread x 1" Nut union	1	0.4	64.50
	NAL5736	Elbow 3/4" Female union thread x 22mm compression	1	0.4	49.00
	NAL6262	Elbow 1" Male union thread x 1" Male union thread	1	0.4	36.40
	NAL6263	Elbow 1" Male union thread x 1" Nut union	1	0.4	47.70
	NAL6273	Elbow 1" Male union thread x 1-1/4" Nut union	1	0.4	76.30
	NAL6363	Elbow 1" Nut union thread x 1" Nut union	1	0.4	59.00
	NAL7262	Elbow 1-1/4" Male union thread x 1" Male union	1	0.4	61.80
	NAL7263	Elbow 1-1/4" Male union thread x 1" Nut union	1	0.4	73.10
	NAL7273	Elbow 1-1/4" Male union thread x 1 1-1/4" Nut union	1	0.4	101.70
	NAT523641	Tee 3/4" M x 22mm Compression x 1/2" NPT F	1	0.1	83.60
	NAT524136	Tee 3/4" Male x 1/2" NPT F x 22mm compression	1	0.1	83.60
	NAT574136	Tee 3/4" Female x 1/2" NPT F x 22mm compression	1	0.1	56.60
	NAT623641	Tee 1" M union x 22mm compression x 1/2" NPT F	1	0.1	65.00
	NAT624136	Tee 1" M union x 1/2" NPTF x 22mm compression	1	0.1	65.00
	NAT624162	Tee 1" M Union x 1/2" NPTF x 1" M Union	1	0.1	44.00
	NAT626241	Tee 1" M Union x 1" M Union x 1/2"NPTF	1	0.1	44.00
	NAT626262	Tee 1" M Union x 1" M union x 1" M union	1	0.1	45.05
	NAT626341	Tee 1" M Union x 1" F Union x 1/2" NPT F	1	0.1	53.50
	NAT626362	Tee 1" M union x 1" Nut union x 1" M union	1	0.1	56.35
	NAT6263TT	Tee 1" M union x 1" Nut union x Temp well	1	0.1	92.05
	NAT62TT63	Tee 1" M union x Temp well x 1" Nut union	1	0.1	92.05
	NAT634162	Tee 1" Nut union x 1/2" NPT F x 1" M union	1	0.1	55.30
	NAT636262	Tee 1" Nut union x 1" M union x 1" M union	1	0.1	56.35
	NAT6362TT	Tee 1" Nut union x 1" M union x Temp well	1	0.1	92.05
NAT724162	Tee 1-1/4" M x Temp well x 1" Male	1	0.1	69.40	
	NAC622641TT	Cross 1" M x 15 compression x 1/2" NPT F x Temp well	1	2.0	152.45
	NAC623641TT	Cross 1" M x 22 compression x 1/2" NPT F x Temp well	1	2.0	152.45
	NAC6262TT41	Cross 1" M x 1" M x Temp well x 1/2" NPT F	1	2.0	131.45
	NAC6263TT41	Cross 1" M x 1" Nut union x Temp well x 1/2" NPT F	1	2.0	142.75
	NAC62TT6241	Cross 1" M x Temp well x 1" M x 1/2" NPT F	1	2.0	131.45
	NAC62TT6341	Cross 1" M x Temp well x 1" Nut union x 1/2" NPT F	1	2.0	142.75
	NAC72TT6241	Cross 1-1/4" M x Temp well x 1" M x 1/2" NPT F	1	2.0	156.85
	NAC72TT7241	Cross 1-1/4" M x Temp well x 1-1/4"M x 1/2" NPT F	1	2.0	182.25

OG-300 Certified Solar Water Heaters Complete Systems "Qualified Distributors Only"

Item	Code	Description	Solar Fraction	Lbs.	List Price Ea.
50 Gal. Single Coil Tank Systems with iSolar Plus - OG-300 Certified					
 	NAS30020-P Plus	no collectors (contact factory for detail list)		490	7,872.00
	NAS30020 Plus	(1) 6.5' collectors		590	11,239.00
	NAS300201 Plus	(2) 6.5' collectors - Energy Star	0.63	680	13,783.00
	NAS30020P8 Plus	(1) 8' collectors		615	11,620.90
	NAS300201P8 Plus	(2) 8' collectors - Energy Star	0.72	730	14,636.70
	NAS30020P10 Plus	(1) 10' collectors - Energy Star	0.50	655	12,020.90
	NAS300201P10 Plus	(2) 10' collectors - Energy Star	0.82	810	15,436.70
80 Gal. Single Coil Tank Systems with iSolar Plus - OG-300 Certified					
	NAS30040-P Plus	no collectors (contact factory for detail list)		660	9,072.00
	NAS30040 Plus	(2) 6.5' collectors - Energy Star	0.63	760	15,004.00
	NAS300401 Plus	(3) 6.5' collectors - Energy Star	0.82	850	17,679.00
	NAS30040P8 Plus	(2) 8' collectors - Energy Star	0.74	785	15,884.70
	NAS300401P8 Plus	(3) 8' collectors - Energy Star	0.94	900	18,964.90
	NAS30040P10 Plus	(2) 10' collectors - Energy Star	0.83	825	16,684.70
	NAS300401P10 Plus	(3) 10' collectors - Energy Star	0.95	980	20,164.90
80 Gal. Dual Coil Tank Systems with iSolar Plus - OG-300 Certified					
	NAS30042-P Plus	no collectors (contact factory for detail list)		610	9,572.00
	NAS30042 Plus	(2) 6.5' collectors - Energy Star	0.73	810	15,439.00
	NAS300421 Plus	(3) 6.5' collectors - Energy Star	0.88	900	18,179.00
	NAS30042P8 Plus	(2) 8' collectors - Energy Star	0.80	835	16,384.70
	NAS300421P8 Plus	(3) 8' collectors - Energy Star	0.96	950	19,464.90
	NAS30042P10 Plus	(2) 10' collectors - Energy Star	0.88	875	17,184.70
	NAS300421P10 Plus	(3) 10' collectors - Energy Star	0.97	1030	20,664.90
119 Gal. Single Coil Tank Systems with iSolar Plus - OG-300 Certified					
	NAS30060-P Plus	no collectors (contact factory for detail list)		670	9,872.00
	NAS30060 Plus	(3) 6.5' collectors - Energy Star	0.75	970	18,395.00
	NAS300601 Plus	(4) 6.5' collectors - Energy Star	0.92	1060	21,127.00
	NAS30060P8 Plus	(3) 8' collectors - Energy Star	0.87	995	19,764.90
	NAS300601P8 Plus	(4) 8' collectors - Energy Star	0.95	1110	22,932.70
	NAS30060P10 Plus	(3) 10' collectors - Energy Star	0.95	1035	20,964.90
	NAS300601P10 Plus	(4) 10' collectors - Energy Star	0.95	1190	24,737.70
119 Gal. Dual Coil Tank Systems with iSolar Plus - OG-300 Certified					
 	NAS30062-P Plus	no collectors (contact factory for detail list)		700	10,372.00
	NAS30062 Plus	(3) 6.5' collectors - Energy Star	0.82	1000	18,830.00
	NAS300621 Plus	(4) 6.5' collectors - Energy Star	0.93	1090	21,627.00
	NAS30062P8 Plus	(3) 8' collectors - Energy Star	0.91	1025	20,264.90
	NAS300621P8 Plus	(4) 8' collectors - Energy Star	0.97	1140	23,432.70
	NAS30062P10 Plus	(3) 10' collectors - Energy Star	0.97	1065	21,464.90
	NAS300621P10 Plus	(4) 10' collectors - Energy Star	0.97	1220	25,237.70

Index

Code	Page	Code	Page	Code	Page	Code	Page
253040	10	NA10104	3	NA254715	13	NAS20080	4
253042	10	NA10116	13	NA255002	4	NAS20082	4
253043	10	NA10118	12	NA255003	8	NAS20083	4
253044	10	NA10119	3, 13	NA255004	8	NAS20120	4
253046	10	NA10120	14	NA255110	5	NAS20122	4
253048	10	NA10126	2	NA255111	5	NAS20123	4
254452	12	NA10130	8	NA255112	5	NAS20124	4
254455	12	NA10131	8	NA255113	5	NAS30020 Plus	18
254462	13	NA10164	10	NA255160	7	NAS300201 Plus	18
254465	13	NA10165	10	NA25540	9	NAS300201P10 Plus	18
254752	12	NA10166	10	NA25549	9	NAS300201P8 Plus	18
254755	12	NA10204	10	NA256011	7	NAS30020-P Plus	18
255007	9	NA10234	4	NA256012	7	NAS30020P10 Plus	18
257205	16	NA10236	3	NA26640	6	NAS30020P8 Plus	18
257206	16	NA12102	11	NA26649	6	NAS30040 Plus	18
257207	16	NA12103	11	NA26650	6	NAS300401 Plus	18
257208	16	NA12104	11	NA26656	6	NAS300401P10 Plus	18
259012	9	NA12112	12	NA26659	6	NAS300401P8 Plus	18
259018	9	NA12113	12	NA26660	6	NAS30040-P Plus	18
259024	9	NA12114	13	NA26669	6	NAS30040P10 Plus	18
259035	9	NA12122	12	NA267002	4	NAS30040P8 Plus	18
259050	9	NA12123	12	NA267003	4	NAS30042 Plus	18
132432A	5	NA12124	13	NA26710	8	NAS300421 Plus	18
132552A	5	NA12132	11	NA26711	7	NAS300421P10 Plus	18
132662A	5	NA12133	11	NA26740	6	NAS300421P8 Plus	18
132772A	5	NA12134	11	NA26749	6	NAS30042-P Plus	18
132882A	5	NA12145	2	NA26750	6	NAS30042P10 Plus	18
250041A	10	NA12146	2	NA26756	6	NAS30042P8 Plus	18
251003A	10	NA12147	2	NA26759	6	NAS30060 Plus	18
251004A	10	NA12152	12	NA26760	6	NAS300601 Plus	18
252149A	10	NA12153	3	NA26769	6	NAS300601P10 Plus	18
252158A	10	NA12154	3	NA29284	10	NAS300601P8 Plus	18
252159A	10	NA12155	3	NA3140-02	4	NAS30060-P Plus	18
252168A	10	NA12156	8	NA35001	11	NAS30060P10 Plus	18
252169A	10	NA12162	13	NA35002	11	NAS30060P8 Plus	18
255010A	7	NA12168	7	NA35003	11	NAS30062 Plus	18
255050A	6	NA12169	7	NA35004	11	NAS300621 Plus	18
255056A	6	NA12170	7	NA35005	11	NAS300621P10 Plus	18
256050A	6	NA12172	12	NA35006	11	NAS300621P8 Plus	18
256056A	6	NA12173	12	NA35007	11	NAS30062-P Plus	18
257201A	14	NA12240	5	NA3520-15	11	NAS30062P10 Plus	18
257202A	15	NA12249	5	NA3540-15	11	NAS30062P8 Plus	18
257202A G1	15	NA12250	5	NA3540-B	11	NAT523641	17
257220A	14	NA12259	5	NA3560-15	11	NAT524136	17
257240A	14	NA12260	5	NA51059	5	NAT574136	17
257260A	14	NA12269	5	NA51069	5	NAT623641	17
257270A	14	NA12340	8	NA605010	16	NAT624136	17
31390 FD	13	NA12349	8	NA79701	15	NAT624162	17
31901A	12	NA12350	8	NA79702	15	NAT626241	17
523058A	10	NA12359	8	NA79703	15	NAT626262	17
523066A	10	NA12360	8	NA79704	15	NAT626362	17
538402 FD	7	NA12369	8	NA79705	15	NAT6263TT	17
59834A	12	NA15006	16	NAC622641TT	17	NAT62TT63	17
61215A	13	NA15008	16	NAC623641TT	17	NAT634162	17
NA10001	12	NA15009	16	NAC6262TT41	17	NAT636262	17
NA10002	12	NA15010	15	NAC6263TT41	17	NAT6362TT	17
NA10003	3, 12	NA15014	15	NAC62TT6241	17	NAT724162	17
NA10042	3, 13	NA15015	15	NAC62TT6341	17	R11059	3
NA10056	10	NA15016	15	NAC72TT6241	17	R21180	7
NA10058	10	NA15017	15	NAL5263	17	R31495	3, 13
NA10060	13	NA15018	15	NAL5736	17	R31706	13
NA10061	3, 13	NA15019	15	NAL6262	17	R41298	12
NA10062	13	NA15020	16	NAL6263	17	R50055	3, 12
NA10064	13	NA15021	16	NAL6273	17	R50056	3, 13
NA10082	7	NA15022	16	NAL6363	17	R50058	12
NA10083	3	NA15027	14	NAL7262	17	R61008	3, 12
NA10085	13	NA15028	14	NAL7263	17	Z111000	9
NA10087	13	NA15029	16	NAL7273	17	Z116000	9
NA10089	13	NA15030	15	NAS10001	2	Z121000	9
NA10090	16	NA15550	7	NAS10002	2	Z126000	9
NA10092	16	NA15559	7	NAS10406	2	Z300537	9
NA10093	4	NA15560	7	NAS10408*	2	Z300637	9
NA10095	12	NA15569	7	NAS10410*	2	Z300667	9
NA10100	2	NA15570	7	NAS20050	4	Z300737	9
NA10103	2	NA254712	13	NAS20053	4	Z307537	9

Form No. 22201/11
Suggested List Price
Effective February 1, 2011
Canceling All Prior Issues
specifications and prices are subject to change without notice

Caleffi North America, Inc. / 3883 W. Milwaukee Road / Milwaukee, WI 53208
Tel: 414.238.2360 / Fax: 414.238.2366
www.caleffi.us / sales@caleffi.com
©Copyright 2011 Caleffi North America, Inc