


# WHISPA™ 50

## Kickspace Heaters from MYSON

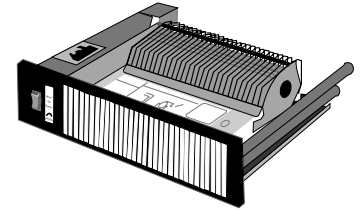

### WHISPA 50 FAN CONVECTOR — BTU/HR HEAT OUTPUT — ENTERING AIR @ 65°F

MODEL #	FLOW RATE GPM	FAN SPEED	AIR DELIVERY CFM	ENTERING WATER TEMPERATURE (°F)										
				110**	120**	130**	140	150	160	170	180	190	200	210
WH 50	1.0	High	46	1,135	1,372	1,606	1,839	2,070	2,299	2,527	2,754	2,980	3,204	3,428
		Low	38	917	1,145	1,377	1,612	1,850	2,093	2,336	2,583	2,833	3,083	3,336
	3.0	High	46	1,305	1,578	1,847	2,115	2,380	2,644	2,906	3,167	3,427	3,685	3,942
		Low	38	931	1,225	1,473	1,725	1,980	2,239	2,500	2,764	3,031	3,299	3,570

\*\*For Output At These Water Temperatures, Optional 107° Low Temperature Cutoff Required.

### KICKSPACE COMPARISON @ 180°F WATER TEMP

MODEL #	GPM	SPEED	BASEBOARD (525 BTU/FT)	C.I. RADIATORS (225 BTU/SQ FT)
WH 50	3	High / Low	6.0 ft / 5.3 ft	14 sq ft


### UNIT WEIGHT (LBS)

MODEL #	UNIT WEIGHT	PACKED WEIGHT
WH 50	9	11


### FRICTION LOSS (HEAD)

GAL/MIN(GPM)	FT. WG
1.0	0.9
3.0	3.3


MYSON reserves the right to make changes or improvements to our products which may affect these specifications.

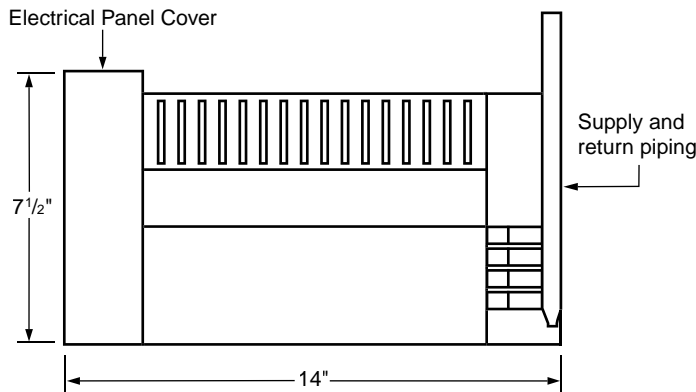

Top View

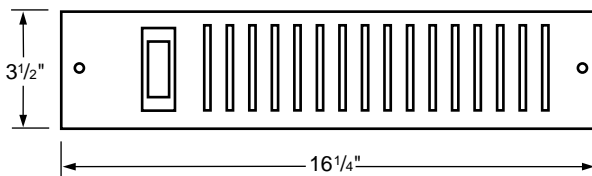

Grill

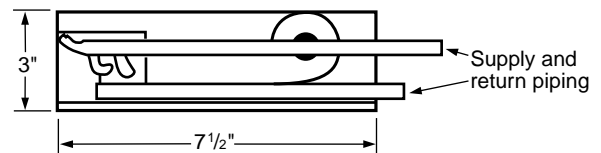

Side View



### WHISPA 50 FAN CONVECTOR SPECIFICATIONS — Engineered to be efficient.

**Controls...**Units have a two-speed High/Off/Low fan switch. For installations without a separate thermostat, all models have low-limit thermostats which close at 129°F and reopen at 109°F (±7°F).

**Construction...**The chassis is manufactured from zinc-coated painted steel. The grill is hardened aluminum for strength and durability.

**Warranty...**MYSON offers a full ten year warranty on the heat exchanger and a full three year warranty on the fan motor.