

**TC1000-H**

# WHOLE HOUSE VENTILATOR

**Solid Roof or Wall Application**

- TC1000-H**
- Energy Efficient
  - No Maintenance
  - Sealed R-6 Insulated Damper
  - Equipped with Single Pole, Single Throw wall switch
  - 1 Speed 800 CFM
  - UL Listed



Inside view, available in white or brown.

**TC1000-H Ventilator** The TC1000H is the only ventilating fan designed and assembled in the USA for use in a solid roof or wall application. Perfect for A-Frame construction or for homes that don't have an attic. Two energy efficient fans move 800 cubic feet of air per minute. A motorized insulated damper seals when the fan is not in use preventing cold air, insects, and the elements from entering your home. The TC1000H is one speed, comes equipped with a wall switch, is maintenance free, carries a three year warranty and is Underwriters Laboratory approved.




320 Main Street • Buzzards Bay, Ma 02532  
508-759-4660 / 800-222-5932 / Fax 508-759-6001

# TC1000-H

# WHOLE HOUSE VENTILATOR

## Solid Roof or Wall Application

### DIMENSIONS

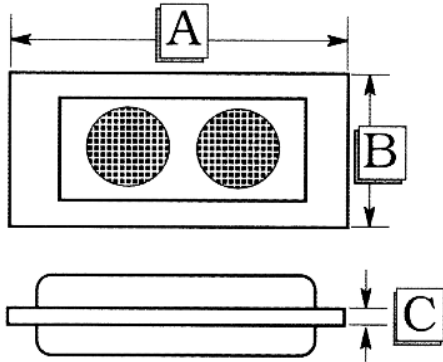

#### TC1000-T (Glazing System Sunrooms)

A		B		C
36"	x	16 5/8"	x	1/4"
29 5/8"	x	19"	x	1"
37"	x	19"	x	1"
30"	x	15 1/8"	x	7/8"
36"	x	15 1/8"	x	7/8"
37 3/8"	x	18 1/4"	x	7/8"
30"	x	15 1/2"	x	7/8"

**TC1000-H** is an innovative design in whole house ventilating. The system is engineered to efficiently reduce the indoor temperature of your entire home.



Outside view, available in white or brown.

### SPECIFICATIONS

#### Electrical:

Voltage	115 VAC 60Hz
Power	110 Watts High 50 Watts Low

Air Flow	800 CFM High 500 CFM Low
----------	--------------------------

Weights	Ventilator: 17 Lbs. Shipping: 32 Lbs.
---------	--

Rough Opening	12 3/4" x 27 3/4"
---------------	-------------------

Available Colors	White or Brown
------------------	----------------

Operation	30 second Damper Cycle Time (Open-Close)
-----------	--

Insulation Value of Closed Damper	R6
-----------------------------------	----

Optional interior grille



320 Main Street • Buzzards Bay, Ma 02532  
508-759-4660 / 800-222-5932 / Fax 508-759-6001