



The Regency Alterra Wood Collection is the next chapter in wood fireplace design, combining the unparalleled tradition of high quality, industry leading engineering with a sleek, modern cast iron finish.

The striking, contemporary design of Alterra CS1200 wood stove puts the focus on the brilliant glowing fire. With an impressive 20% greater viewing area than traditional wood stoves, and a handy fire-wood storage area at its base, the CS1200 is perfectly proportioned for visual pleasure and functional convenience.

Standard Features

- Metallic black cast iron door
- Reversible cast iron door with removable handle
- EPA Certified
- Mobile home and alcove approved
- Closest clearances in the industry
- Single rod draft control
- Brick-lined firebox
- Airwash system
- Built-in top louver airmate


Optional Features

- Coloured side panels
- Ash drawer
- 2-speed blower
- Outside air kit

| Specifications | CS1200 |
|------------------------|-------------|
| Maximum BTU* | 55,000 |
| Typical Sq. Ft. Heated | 600-1200 |
| Efficiency | 77.7% |
| Maximum Log Size | 18" |
| Burn Time (Typical)* | up to 8 hrs |
| Emissions (grams/hr) | 3.0g |
| Firebox Size | 1.4 cu. ft. |
| Flue Size | 6" |

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.


specifications

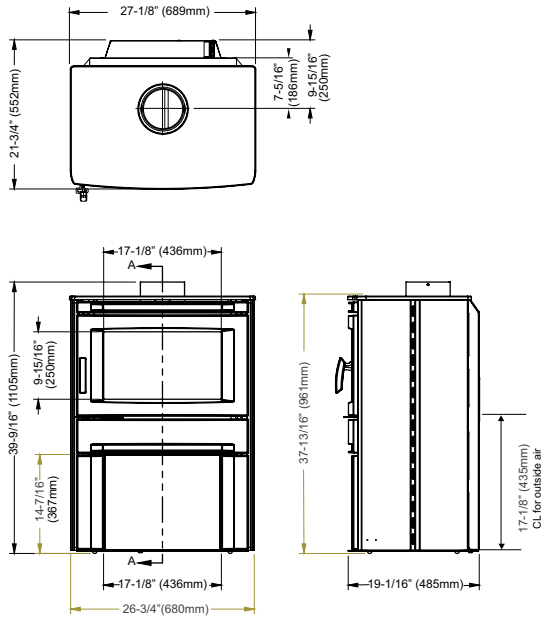

Side panel options




Minimum clearance to combustible materials

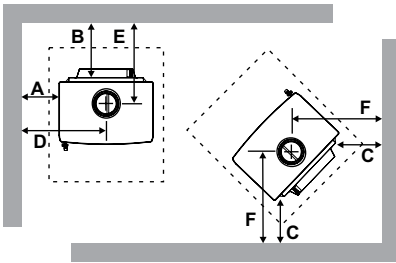

| Residential Installation "C" Vent (Single Wall) | FROM UNIT | | FROM CORNER | | FROM FLUE CENTER-LINE | |
|--|-----------|-----|-------------|---------|--------------------------|---------|
| | A | B | C | D | E | F |
| CS1200 | 13" | 11" | 8" | 26-3/8" | 18-1/2" | 20-3/4" |
| Residential Close Clearance (To be installed with required pipe components) | | | | | | |
| CS1200 | 11" | 7" | 7" | 24-1/2" | 14-1/2" | 19-3/4" |
| Mobile Home Close Clearance (To be installed with required pipe components) | | | | | | |
| CS1200 | 11" | 7" | 7" | 24-1/2" | 14-1/2" | 19-3/4" |


These clearances are certified clearances for the stove, however, the clearance to the combustibles and the single wall stove pipe must also be maintained. You can reduce the stove pipe clearance with a stove pipe heat shield.

Minimum alcove clearance to combustible materials



| Minimum Alcove Clearance | FROM UNIT | | FROM FLUE CENTER-LINE | | MIN. WIDTH | Min. Hearth to Rear Wall |
|--------------------------|-----------|----|--------------------------|---------|---------------|--------------------------------|
| | G | H | I | J | K | L |
| CS1200 | 11" | 7" | 24-1/2" | 14-1/2" | 49-1/8" | 39-1/4" |

Floor protection

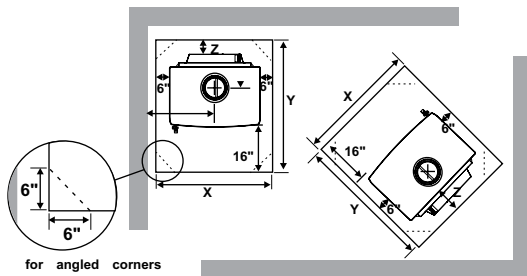

| FLOOR PROTECTION | Residential "C" Vent | | Residential Close Clearance | | Mobile Home Close Clearance | | Alcove | |
|------------------|-------------------------|----|--------------------------------|----|--------------------------------|----|--------|----|
| | Y | Z | Y | Z | Y | Z | Y | Z |
| USA | 39" | 6" | 39" | 6" | 39" | 6" | 39" | 6" |
| Canada | 43" | 8" | 43" | 8" | 43" | 8" | 43" | 8" |

These are guidelines only, subject to change without notice. Always refer to the actual product manual that comes with your unit for specific, current dimensions and clearances.