


- UL-listed
- up to 200 watts
- install easily
- back lit on/off switch
- wall and portable models
- most models are available in chrome, nickel, satin nickel, regal brass, satin brass, gold, satin gold plate, baked epoxy powdercoat white finishes or custom colors
- special order models and custom sizes available
- provided with necessary matching installation accessories
- 5 year Myson Warranty

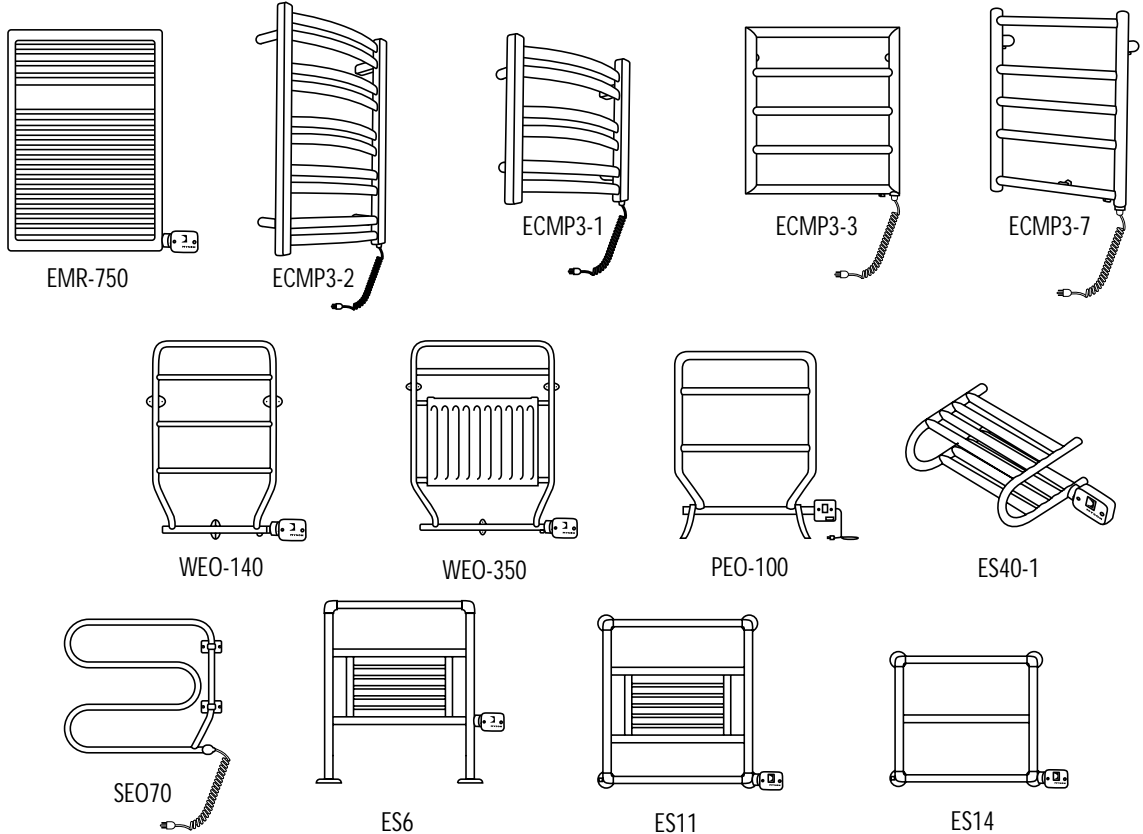


| Model                | V/Hz      | Watts | Amps | Overall Height (in) | Overall Width (in) | Overall Width Incl. Electric Box (in) | Center of Flange to Wiring Conn. (in) | Width C to C Vert. Tubes (in) | Bottom Rail to Center of Flange (in) | Center Rt. Rail to Wire Conn. (in) | Overall Projection (in) | Tube Diameter (in) | Shipping Weight (lbs) | Special Order |
|----------------------|-----------|-------|------|---------------------|--------------------|---------------------------------------|---------------------------------------|-------------------------------|--------------------------------------|------------------------------------|-------------------------|--------------------|-----------------------|---------------|
| EMR750               | 120V/60Hz | 200   | 1.75 | 29-7/8              | 19-3/4             | 22-3/8                                | -                                     | 18-1/2                        | 25-1/2                               | 2                                  | 3-5/8                   | 1-1/4 / 1          | 39                    | N/A           |
| ECMP3/1 <sup>1</sup> | 120V/60Hz | 70    | 0.63 | 19-7/8              | 17-1/4             | -                                     | -                                     | 15-1/4                        | -                                    | -                                  | 5-1/4                   | 1-1/4 / 1          | 20                    | N/A           |
| ECMP3/2 <sup>2</sup> | 120V/60Hz | 70    | 0.63 | 34                  | 17-1/4             | -                                     | -                                     | 15-1/4                        | -                                    | -                                  | 5-1/4                   | 1-1/4 / 1          | 28                    | N/A           |
| ECMP3/3 <sup>3</sup> | 120V/60Hz | 70    | 0.63 | 21-3/4              | 19-5/8             | -                                     | -                                     | 18-1/4                        | 17-1/2                               | -                                  | 3-7/8                   | 1-1/4 / 1          | 24                    | N/A           |
| ECMP3/7 <sup>7</sup> | 120V/60Hz | 70    | 0.63 | 21-1/4              | 17-1/2             | -                                     | -                                     | 16-1/4                        | 16-1/2                               | -                                  | 3-7/8                   | 1-1/4 / 1          | 24                    | N/A           |
| WEO100               | 120V/60Hz | 100   | 0.76 | 24-1/4              | 23                 | 23-3/4                                | 10-3/4                                | 20                            | 14                                   | -                                  | 4                       | 1                  | 21                    | N/A           |
| WEO140               | 120V/60Hz | 140   | 1.10 | 33-1/2              | 23                 | 23-3/4                                | 10-3/4                                | 20                            | 23-1/8                               | -                                  | 4                       | 1                  | 31                    | N/A           |
| WEO165               | 120V/60Hz | 165   | 1.26 | 33-1/2              | 33                 | 33                                    | 11-3/4                                | 29-3/4                        | 20-1/4                               | -                                  | 4                       | 1                  | 37                    | N/A           |
| WEO350               | 120V/60Hz | 200   | 1.75 | 33-1/2              | 25-1/4             | 25-1/4                                | 11-3/4                                | 22                            | 25-1/4                               | -                                  | 4-1/2                   | 1                  | 40                    | N/A           |
| PEO100               | 120V/60Hz | 100   | 0.76 | 27-3/4              | 23                 | 23-3/4                                | -                                     | 20                            | -                                    | -                                  | 4                       | 1                  | 21                    | N/A           |
| PEO140               | 120V/60Hz | 140   | 1.10 | 37                  | 23                 | 23-3/4                                | -                                     | 20                            | -                                    | -                                  | 4                       | 1                  | 31                    | N/A           |
| PEO165               | 120V/60Hz | 165   | 1.26 | 37                  | 33                 | 33                                    | -                                     | 29-3/4                        | -                                    | -                                  | 4                       | 1                  | 37                    | N/A           |
| PEO350               | 120V/60Hz | 200   | 1.75 | 37                  | 24-1/4             | 25-1/4                                | -                                     | 22                            | -                                    | -                                  | 4-1/2                   | 1                  | 40                    | N/A           |
| ES40/1               | 120V/60Hz | 100   | 0.76 | 6-3/4               | 18-1/4             | 21-5/8                                | -                                     | 17                            | -                                    | 2-5/8                              | 12                      | 1-1/4              | 34                    | N/A           |
| ES40/2               | 120V/60Hz | 140   | 1.10 | 6-3/4               | 24-1/4             | 27-5/8                                | -                                     | 23                            | -                                    | 2-5/8                              | 12                      | 1-1/4              | 34                    | N/A           |
| SEO70*               | 120V/60Hz | 70    | 0.63 | 19-7/8              | 22-7/8             | 23 1/4                                | -                                     | -                             | -                                    | -                                  | 3-1/2                   | 1                  | 21                    | N/A           |
| Flr. to Center Conn. |           |       |      |                     |                    |                                       |                                       |                               |                                      |                                    |                         |                    |                       |               |
| ES6/1                | 120V/60Hz | 165   | 1.26 | 36-5/8              | 27-1/4             | 30                                    | -                                     | 24                            | 12                                   | 2-5/8                              | Depends on Wall Stays   | 1-1/4              | 53                    | ✓             |
| ES6/2                | 120V/60Hz | 165   | 1.26 | 36-5/8              | 33-1/4             | 36                                    | -                                     | 30                            | 12                                   | 2-5/8                              |                         | 1-1/4              | 62                    | ✓             |
| ES11/1               | 120V/60Hz | 165   | 1.26 | 27-1/4              | 27-1/4             | 30                                    | -                                     | 24                            | -                                    | 3                                  | 6-1/2                   | 1-1/4              | 53                    | ✓             |
| ES11/2               | 120V/60Hz | 165   | 1.26 | 33-1/4              | 33-1/4             | 36                                    | -                                     | 30                            | -                                    | 3                                  | 6-1/2                   | 1-1/4              | 62                    | ✓             |
| ES14/5               | 120V/60Hz | 100   | 0.76 | 27                  | 27                 | 30                                    | -                                     | 24                            | -                                    | 2-5/8                              | 6-1/2                   | 1-1/4              | 53                    | ✓             |
| ES14/6               | 120V/60Hz | 100   | 0.76 | 27                  | 33                 | 36                                    | -                                     | 30                            | -                                    | 2-5/8                              | 6-1/2                   | 1-1/4              | 53                    | ✓             |

✓ Special order models are non-stock items. Please call Myson at 1-800-698-9690 for details.

\* SEO70 available in chrome and white only. <sup>1</sup>Pending Electric Approvals

- UL-approved with back lit on/off switch
- up to 200 watts
- easy installation
- floor standing or wall-mounted
- chrome, nickel, satin nickel, regal brass, satin brass, gold, satin gold plate finish
- combination finishes include chrome/gold; chrome/regal brass; white/gold and more
- available in baked epoxy powdercoat white finish or a palette of 1200 colors
- special order models and custom sizes available
- provided with necessary matching installation accessories
- 5 year Myson Warranty

Premier Towel Warmers create a dramatic focal point for any wall...adding heat, elegance and style to any room. The new Premier Space-Saver model is perfect for small kitchens and guest bathrooms.

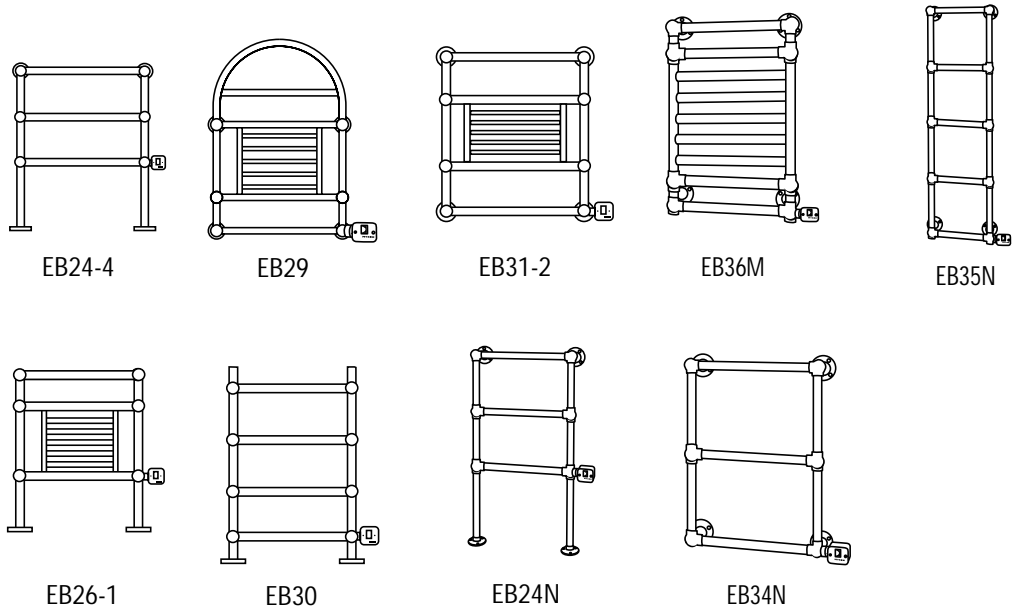

| Model  | V/Hz      | Watts | Amps | Overall Height (in) | Overall Width Including Flanges (in) | Overall Width Incl. Elec. Box (in) | Width C/C Vertical Tubes (in) | Center of Rt. Rail to Wiring Conn. (in) | Floor to Center of Elec. Box (in) | Overall Projection (in) | Tube Diameter (in) | Approx. Shipping Weight (lbs) | Special Order |
|--------|-----------|-------|------|---------------------|--------------------------------------|------------------------------------|-------------------------------|---|-----------------------------------|-------------------------|--------------------|-------------------------------|---------------|
| EB24/4 | 120V/60Hz | 140   | 1.10 | 37-5/8              | 27-1/4                               | 30                                 | 24                            | 2-5/8                                   | 15                                | 5-5/8                   | 1-1/4              | 66                            | N/A           |
| EB24/5 | 120V/60Hz | 140   | 1.10 | 37-5/8              | 33-1/4                               | 36                                 | 24                            | 2-5/8                                   | 15                                | 5-5/8                   | 1-1/4              | 71                            | ✓             |
| EB24/6 | 120V/60Hz | 140   | 1.10 | 37-5/8              | 39-1/4                               | 42                                 | 30                            | 2-5/8                                   | 15                                | 5-5/8                   | 1-1/4              | 71                            | ✓             |
| EB26/1 | 120V/60Hz | 165   | 1.30 | 36-7/8              | 27-1/4                               | 30                                 | 24                            | 2-5/8                                   | 12                                |                         | 1-1/4              | 47                            | N/A           |
| EB26/2 | 120V/60Hz | 165   | 1.30 | 36-7/8              | 33-1/4                               | 36                                 | 30                            | 2-5/8                                   | 12                                |                         | 1-1/4              | 52                            | ✓             |
| EB26/3 | 120V/60Hz | 165   | 1.30 | 36-7/8              | 39-1/4                               | 42                                 | 36                            | 2-5/8                                   | 12                                |                         | 1-1/4              | 52                            | ✓             |
| EB26/4 | 120V/60Hz | 165   | 1.30 | 36-7/8              | 45-1/4                               | 48                                 | 42                            | 2-5/8                                   | 12                                |                         | 1-1/4              | 52                            | ✓             |
| EB29   | 120V/60Hz | 165   | 1.30 | 41                  | 27-1/4                               | 30                                 | 24                            | 3                                       | —                                 | 5-1/2                   | 1-1/4              | 66                            | N/A           |
| EB30   | 120V/60Hz | 200   | 1.75 | 39                  | 27-1/4                               | 30                                 | 24                            | 2-5/8                                   | 4-1/4                             | 8-3/4                   | 1-1/4              | 79                            | N/A           |
| EB31/1 | 120V/60Hz | 165   | 1.30 | 27-1/4              | 27-1/4                               | 30                                 | 24                            | 3                                       | —                                 | 5-5/8                   | 1-1/4              | 52                            | ✓             |
| EB31/2 | 120V/60Hz | 165   | 1.30 | 33-1/4              | 33-1/4                               | 36                                 | 30                            | 3                                       | —                                 | 5-5/8                   | 1-1/4              | 52                            | N/A           |
| EB31/3 | 120V/60Hz | 165   | 1.30 | 33-1/4              | 39-1/4                               | 42                                 | 36                            | 3                                       | —                                 | 5-5/8                   | 1-1/4              | 60                            | ✓             |
| EB31/4 | 120V/60Hz | 165   | 1.30 | 33-1/4              | 45-1/4                               | 48                                 | 42                            | 3                                       | —                                 | 5-5/8                   | 1-1/4              | 60                            | ✓             |
| EB34/5 | 120V/60Hz | 100   | 0.76 | 27-1/4              | 27-1/4                               | 30                                 | 24                            | 3                                       | —                                 | 5-5/8                   | 1-1/4              | 40                            | N/A           |
| EB34/6 | 120V/60Hz | 100   | 0.76 | 27-1/4              | 33-1/4                               | 36                                 | 30                            | 3                                       | —                                 | 5-5/8                   | 1-1/4              | 54                            | ✓             |
| EB34/7 | 120V/60Hz | 140   | 1.10 | 27-1/4              | 39-1/4                               | 42                                 | 36                            | 3                                       | —                                 | 5-5/8                   | 1-1/4              | 71                            | ✓             |
| EB34/8 | 120V/60Hz | 140   | 1.10 | 33-1/4              | 39-1/4                               | 42                                 | 36                            | 3                                       | —                                 | 5-5/8                   | 1-1/4              | 71                            | ✓             |


| Space-Saver Models |           |     |      |        |        |        |    |       |    |       |       |    |     |
|--------------------|-----------|-----|------|--------|--------|--------|----|-------|----|-------|-------|----|-----|
| EB24N              | 120V/60Hz | 100 | 0.76 | 37-5/8 | 21-1/4 | 23-5/8 | 18 | 2-5/8 | 15 | 5-5/8 | 1-1/4 | 30 | N/A |
| EB34N              | 120V/60Hz | 100 | 0.76 | 27-1/4 | 21-1/4 | 23-5/8 | 18 | 3     | —  | 5-7/8 | 1-1/4 | 30 | N/A |
| EB35N              | 120V/60Hz | 140 | 1.10 | 51-1/4 | 15-1/4 | 18     | 12 | 3     | —  | 5-7/8 | 1-1/4 | 35 | N/A |
| EB36M              | 120V/60Hz | 165 | 1.30 | 27-1/4 | 21-1/4 | 24     | 18 | 3     | —  | 5-7/8 | 1-1/4 | 35 | N/A |

✓ Special order models are non-stock items. Please call Myson at 1-800-698-9690 for details.


# Master Suite Electric

Master Suite Electric Towel Warmers are the ultimate in Period styling, adding both heat and drama to any room in your home.


- UL-listed with back lit on/off switch
- up to 500 watts
- wall and floor models
- chrome, nickel, satin nickel, regal brass, satin brass, gold, satin gold plate finish
- baked epoxy powdercoat white finish or custom colors
- combination finishes include chrome/gold; chrome/regal brass; white/gold and more
- provided with necessary matching installation accessories
- custom sizes available
- 5 year Myson Warranty




EB25




EB35




EB36



EB47



EB49



EVR1


| Model  | V/Hz      | Watts | Amps | Overall Height (in) | Overall Width Incl. Flanges (in) | Overall Width Incl. Elec. Box (in) | Width C/C Vertical Tubes (in) | Center of Rt. Rail to Wiring Conn. (in) | Floor to Center of Elec. Box (in) | Overall Projection (in) | Tube Diameter (in) | Shipping Weight* (lbs) |
|--------|-----------|-------|------|---------------------|----------------------------------|------------------------------------|-------------------------------|---|-----------------------------------|-------------------------|--------------------|------------------------|
| EB25/1 | 120V/60Hz | 200   | 1.75 | 61-5/8              | 21-1/4                           | 23-5/8                             | 18                            | 2-5/8                                   | 12                                | 5-3/8                   | 1-1/4              | 150                    |
| EB25/2 | 120V/60Hz | 200   | 1.75 | 61-5/8              | 27-1/4                           | 29-5/8                             | 24                            | 2-5/8                                   | 12                                | 5-3/8                   | 1-1/4              | 150                    |
| EB25/3 | 120V/60Hz | 300   | 2.73 | 61-5/8              | 33-1/4                           | 35-5/8                             | 30                            | 2-5/8                                   | 12                                | 5-3/8                   | 1-1/4              | 150                    |
| EB35/1 | 120V/60Hz | 200   | 1.75 | 51-1/4              | 21-1/4                           | 24                                 | 18                            | 3                                       | —                                 | 6-7/8                   | 1-1/4              | 150                    |
| EB35/2 | 120V/60Hz | 200   | 1.75 | 51-1/4              | 27-1/4                           | 30                                 | 24                            | 3                                       | —                                 | 6-7/8                   | 1-1/4              | 150                    |
| EB35/3 | 120V/60Hz | 300   | 2.73 | 51-1/4              | 33-1/4                           | 36                                 | 30                            | 3                                       | —                                 | 6-7/8                   | 1-1/4              | 150                    |
| EB36/1 | 120V/60Hz | 300   | 2.73 | 51-1/4              | 21-1/4                           | 24                                 | 18                            | 3                                       | —                                 | 6-7/8                   | 1-1/4              | 150                    |
| EB36/2 | 120V/60Hz | 300   | 2.73 | 51-1/4              | 27-1/4                           | 30                                 | 24                            | 3                                       | —                                 | 6-7/8                   | 1-1/4              | 150                    |
| EB47/1 | 120V/60Hz | 300   | 2.73 | 68-3/8              | 27-1/4                           | 29-5/8                             | 24                            | 2-5/8                                   | 12                                | 5-3/8                   | 1-1/4              | 150                    |
| EB47/2 | 120V/60Hz | 300   | 2.73 | 68-3/8              | 33-1/4                           | 35-5/8                             | 30                            | 2-5/8                                   | 12                                | 5-3/8                   | 1-1/4              | 150                    |
| EB49   | 120V/60Hz | 300   | 2.73 | 73-1/2              | 27-1/4                           | 29-5/8                             | 24                            | 2-5/8                                   | 12                                | 5-3/8                   | 1-1/4              | 150                    |
| EVR-1  | 120V/60Hz | 500   | 4.2  | 37-1/2              | 26-3/4                           | 29                                 | 23-7/16                       | 2-3/8                                   | 11-1/2                            | 8-1/8                   | 1-1/4              | 75                     |

\*150 lb. minimum must ship via truck


# Multi-Rail, Aloha & ECO Electric

- wall-mounted models
- manufactured from the highest quality materials
- heat output for warming towels and the room
- up to 700 watts of power
- chrome, nickel, satin nickel, regal brass, satin brass, gold, satin gold plate finish
- available in baked epoxy powdercoat white finish or custom colors
- provided with necessary matching installation accessories
- ERR models available with matching optional towel rail for extra hanging space
- 5 year Myson Warranty


Multi-Rail, ECO & Aloha electric Towel Warmers, with their simple lines and large sizing, will meet any space or warmth requirement.



ERR1



ECM4



EECOS125

## Multi-Rail Electric

| Model | V/Hz         | Watts | Amps | Overall Height (in) | Overall Width Including Elec. Box (in) | Width C/C Vertical Tubes (in) | Overall Projection (in) | Tube Diameter (in)    | Shipping Weight* (lbs) |     |
|-------|--------------|-------|------|---------------------|--|-------------------------------|-------------------------|-----------------------|------------------------|-----|
| ERR1  | 120Volt/60Hz | 300   | 2.73 | 33                  | 20                                     | 18-1/2                        | 4                       | 1-1/4" Vertical Tubes | 41                     |     |
| ERR2  | 120Volt/60Hz | 300   | 2.73 | 33                  | 24                                     | 22-1/2                        | 4                       |                       | 47                     |     |
| ERR3  | 120Volt/60Hz | 300   | 2.73 | 33                  | 30                                     | 28-1/4                        | 4                       |                       | 58                     |     |
| ERR4  | 120Volt/60Hz | 500   | 4.20 | 50                  | 20                                     | 18-1/2                        | 4                       |                       | 61                     |     |
| ERR5  | 120Volt/60Hz | 500   | 4.20 | 50                  | 24                                     | 22-1/2                        | 4                       |                       | 70                     |     |
| ERR6  | 120Volt/60Hz | 500   | 4.20 | 50                  | 30                                     | 28-1/4                        | 4                       |                       | 84                     |     |
| ERR7  | 120Volt/60Hz | 700   | 6.37 | 74                  | 20                                     | 18-1/2                        | 4                       |                       | 1" Horizontal Tubes    | 150 |
| ERR8  | 120Volt/60Hz | 700   | 6.37 | 74                  | 24                                     | 22-1/2                        | 4                       |                       |                        | 150 |
| ERR9  | 120Volt/60Hz | 700   | 6.37 | 74                  | 30                                     | 28-1/4                        | 4                       |                       |                        | 150 |

## Aloha Models Electric

|      |               |     |      |        |        |        |       |                           |     |
|------|---------------|-----|------|--------|--------|--------|-------|---------------------------|-----|
| ECM1 | 120Volt/60 Hz | 300 | 2.73 | 31-1/4 | 19-3/4 | 17-1/2 | 5-1/4 | 1-1/2" Vertical "D" Tubes | 41  |
| ECM2 | 120Volt/60 Hz | 300 | 2.73 | 31-1/4 | 23-5/8 | 21-3/8 | 5-1/4 |                           | 47  |
| ECM3 | 120Volt/60 Hz | 300 | 2.73 | 31-1/4 | 29-1/2 | 27-1/4 | 5-1/4 |                           | 58  |
| ECM4 | 120Volt/60 Hz | 500 | 4.20 | 49-3/4 | 19-3/4 | 17-1/2 | 5-1/4 | 1" Oval Horizontal Tubes  | 61  |
| ECM5 | 120Volt/60 Hz | 500 | 4.20 | 49-3/4 | 23-5/8 | 21-3/8 | 5-1/4 |                           | 70  |
| ECM6 | 120Volt/60 Hz | 500 | 4.20 | 49-3/4 | 29-1/2 | 27-1/4 | 5-1/4 |                           | 84  |
| ECM7 | 120Volt/60 Hz | 700 | 6.37 | 75-3/4 | 19-3/4 | 17-1/2 | 5-1/4 |                           | 150 |
| ECM8 | 120Volt/60 Hz | 700 | 6.37 | 75-3/4 | 23-5/8 | 21-3/8 | 5-1/4 |                           | 150 |
| ECM9 | 120Volt/60 Hz | 700 | 6.37 | 75-3/4 | 29-1/2 | 27-1/4 | 5-1/4 |                           | 150 |

## Eco Models Electric Pending Electric Approvals

|           |               |     |      |        |        |        |   |                           |     |
|-----------|---------------|-----|------|--------|--------|--------|---|---------------------------|-----|
| EECOS-85  | 120Volt/60 Hz | 300 | 2.73 | 34     | 19-5/8 | 17-3/4 | 4 | 1-1/2" Vertical "D" Tubes | 40  |
| EECOS-86  | 120Volt/60 Hz | 300 | 2.73 | 34     | 23-5/8 | 21-5/8 | 4 |                           | 45  |
| EECOS-125 | 120Volt/60 Hz | 300 | 2.73 | 48-1/4 | 19-5/8 | 17-3/4 | 4 |                           | 60  |
| EECOS-126 | 120Volt/60 Hz | 300 | 2.73 | 48-1/4 | 23-5/8 | 21-5/8 | 4 | 1" Horizontal Tubes       | 70  |
| EECOS-185 | 120Volt/60 Hz | 500 | 4.20 | 71-1/8 | 19-5/8 | 17-3/4 | 4 |                           | 150 |
| EECOS-186 | 120Volt/60 Hz | 500 | 4.20 | 71-1/8 | 23-5/8 | 21-5/8 | 4 |                           | 150 |

\*150 lb. minimum must ship via truck