


AQUA FLO® Filters & Cartridges



The Aqua Flo range of filters and replacement cartridges improves water quality in the home, farm or business. Requiring no special tools, Aqua Flo filters are easily installed and cartridge replacement is simple and worry-free.

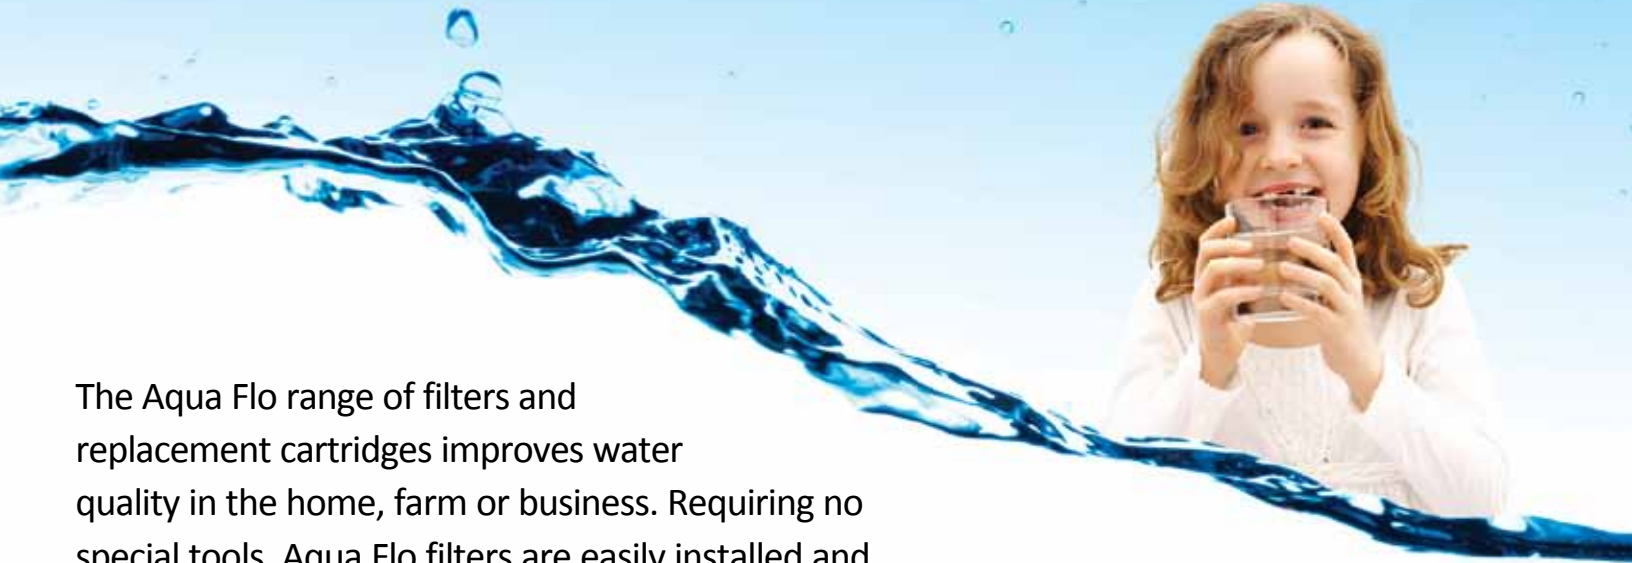

Water Filters

26003 WIM14 Disposable Water Filter

This replacement filter for ice makers, water dispensers and the WF Water Filter System contains the finest coconut shell based granular activated carbon. Ideal for the improvement of unpleasant tastes and odors.

- Cartridge Type:.....Taste and odor
- Cartridge Construction:Granular activated carbon
Polypropylene casing
- Cartridge Temperature:32 - 125°F (0 - 52°C)
- Dimensions:.....2-1/4" x 8"
- Recom. Flow Rate:0.1 - 0.5 USGPM
- Micron Rating:.....N/A

Note: This is a replacement cartridge for the WF14 Filtration System.



26004 WWF Faucet Water Filter

This compact unit attaches to your faucet and features an easy to change carbon cartridge. It improves your water's taste and odor while removing sediment. This filter features a built-in bypass for your convenience.

- Cartridge Type:.....Taste and odor
- Cartridge Construction:Granular activated carbon
Polypropylene casing
- Cartridge Temperature:32 - 125°F (0 - 52°C)
- Dimensions:2-3/4" W x 5-3/4" L x 4" H
- Recom. Flow Rate:0.1 - 0.5 USGPM
- Micron Rating:.....N/A

Single packing only



Water Filters

Aqua Flo® standard 10" water filters are packaged complete with housing, sump wrench, plastic adapter and fittings (cartridge not included). Sumps are manufactured from FDA Styrene-Acrilonitrile, stress relieved for extra clarity and strength. Clear sumps allow on-site examination of flow, cartridge performance and life. Heads are manufactured from reinforced polypropylene. Each unit is sealed with a top seated Buna O-ring. In addition, specialty filters are available.

26001 WVIH34 Deluxe Water Filter

This model features a built-in bypass and shut-off for easy cartridge replacement. Standard 3/4" NPT inlet and outlet.

- Construction:.....FDA Styrene-Acrilonitrile
- Dimensions:4-13/16" x 13-3/4"
- Maximum Pressure:125 psig (862 kPa)
- Maximum Temperature:125°F (52°C)

Available in case lots of 12.

Available without individual cartons, fittings and accessories - 26036 WVIH34

26000 WCT34 Water Filter

This model, complete with pressure relief/bleed button, installs under the sink to take care of your water problems. Standard 3/4" NPT inlet and outlet.

- Construction:.....FDA Styrene-Acrilonitrile
- Dimensions:.....4-13/16" x 11-5/8"
- Maximum Pressure:125 psig (862 kPa)
- Maximum Temperature:.....125°F (52°C)

Available in case lots of 12.

Available without individual cartons, fittings and accessories - 26041 WCT34

26002 WF14 Point-of-Use Water Filter System

This system features the WIM14 coconut shell activated carbon filter cartridge. It installs under the sink and provides a separate faucet for clean, clear, great tasting drinking and cooking water.

- Cartridge Type:.....Taste and odor
- Cartridge Construction:Granular activated carbon
Polypropylene casing
- Cartridge Temperature:32 - 125°F (0 - 52°C)
- Cartridge Dimensions:.....2-1/4" x 8"
- Recom. Flow Rate:0.1 - 0.5 USGPM
- Micron Rating:.....N/A



Accessories



26007 Sump Wrench (new style)

Wrench with six notches. Fits Aqua Flo sumps manufactured since January 1993.

92289 Sump Wrench (old style)

Wrench with four notches. Fits Aqua Flo sumps manufactured prior to 1993.



26023 Mounting Bracket

Convenient bracket with eight screws for mounting on the WC34 filter.



26049 Aqua Flo Sump & O-Ring

26022 O-Ring

Buna O-ring seals filter sump and head.

Cartridge Selection Guide

Problem	Solution
Cloudy or rusty water	WS10, WSW30
Water with fine sediment or turbidity	WSW05
Unpleasant taste, odor and cloudiness or rust color	WC10, WIM14
Unpleasant taste and odor	WT10, WFFRC

WARNING: Do not use on drinking water supplies which are microbiologically unsafe or of unknown quality without first adequately disinfecting the water.
NOTE: All dimensions and micron ratings are nominal.
 The manufacturer reserves the right to make product improvements which may deviate from the specifications and descriptions stated herein, without obligation to change previously manufactured products or to note the change.

