


WHISPA™ II

Recessed Wall Heaters



WHISPA II SERIES RECESSED WALL HEATER — CERTIFIED BTU/HR OUTPUT — ENTERING AIR @ 65°F

MODEL #	FLOW RATE GPM	FAN SPEED	AIR DELIVERY CFM	ENTERING WATER TEMPERATURE (°F), OUTPUT (BTU/hr)									
				110**	120**	130**	140	150	160	170	180	190	200
WH II 5000W	1.0	Boost	93	1,728	2,139	2,555	2,976	3,400	3,827	4,257	4,689	5,125	5,562
		Normal	62	1,393	1,721	2,051	2,384	2,719	3,056	3,396	3,736	4,079	4,422
	3.0	Boost	93	2,008	2,472	2,939	3,409	3,881	4,354	4,830	5,308	5,786	6,267
		Normal	62	1,619	1,988	2,359	2,731	3,104	3,478	3,853	4,229	4,605	4,983
WH II 9000W	1.0	Boost	134	3,068	3,805	4,553	5,309	6,072	6,842	7,618	8,400	9,186	9,977
		Normal	95	2,417	2,988	3,566	4,149	4,736	5,328	5,923	6,522	7,123	7,728
	3.0	Boost	134	3,558	4,396	5,244	6,098	6,958	7,825	8,696	9,571	10,451	11,335
		Normal	95	2,717	3,356	4,001	4,652	5,307	5,966	6,628	7,294	7,963	8,635

MYSON reserves the right to make changes or improvements to our products which may affect these specifications.

**For output at these water temperatures, optional 107°F low temperature cut off required.

HEAT OUTPUT COMPARISON @ 180°F WATER TEMP


MODEL #	FLOW RATE GPM	FAN SPEED	BASEBOARD (525 BTU/FT)	C.I. RADIATORS (225 BTU/SQ FT)
WH II 5000W	3.0	Boost/Low	10.1 ft / 8.1 ft	24 sq ft / 19 sq ft
WH II 9000W	3.0	Boost/Low	18.2 ft / 13.9 ft	43 sq ft / 32 sq ft

UNIT WEIGHT (LBS)

MODEL #	UNIT WEIGHT	WEIGHT PACKED
WH II 5000W	18	21
WH II 9000W	21	25

FRICTION LOSS (HEAD)

MODEL #	FLOW RATE GPM	FT WG
WH II 5000W	1.0 / 3.0	0.13 / 1.20
WH II 9000W	1.0 / 3.0	0.40 / 2.77

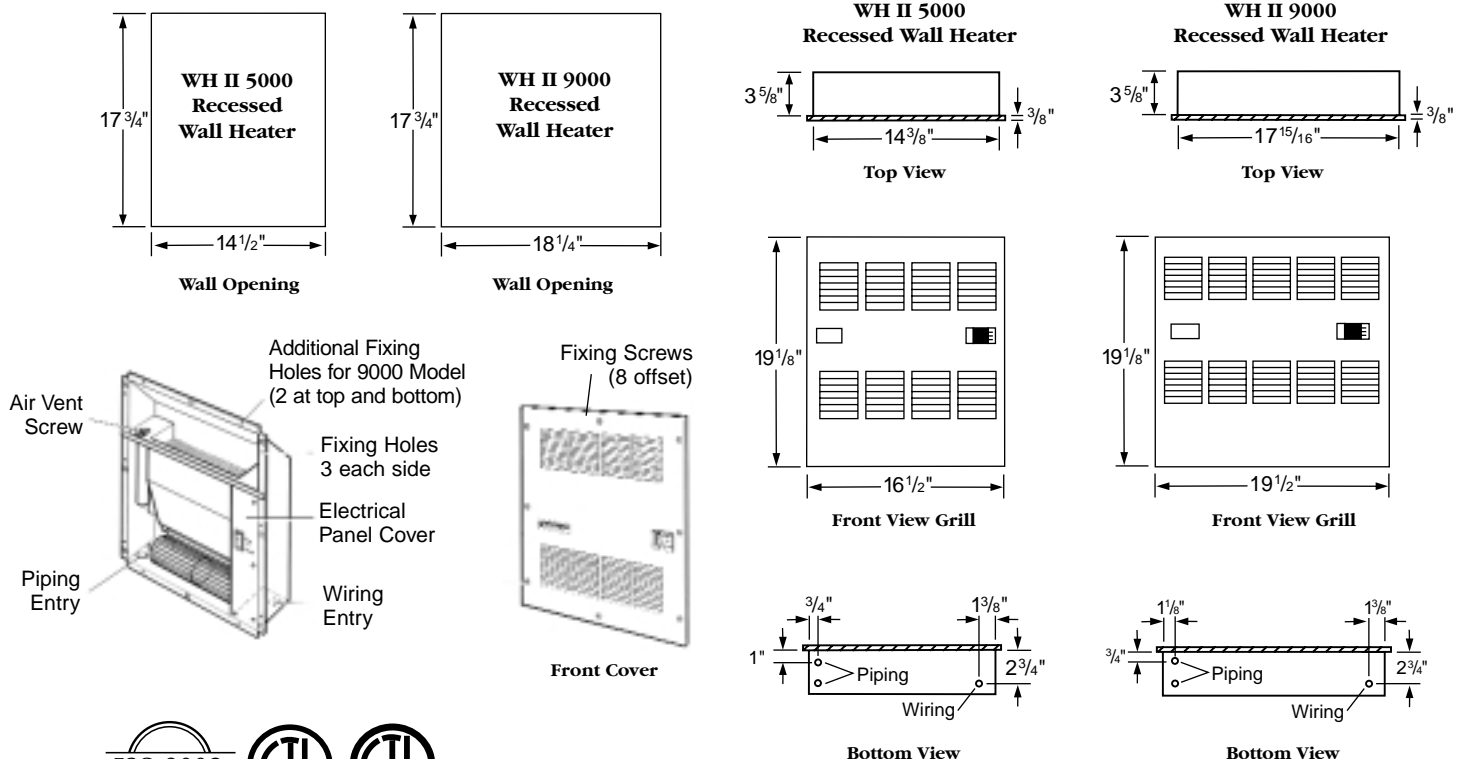

WHISPA II RECESSED WALL FAN CONVECTOR SPECIFICATIONS — Engineered to be efficient.

Controls...Units have a two-speed Boost/Off/Low fan switch. For installations without a separate thermostat, all models have low-limit thermostats which close at 129° and reopen at 109° (± 7°F).

Construction...The chassis is manufactured from zinc-coated painted steel. The grille is hardened aluminum with a white, baked epoxy polyester finish for strength and durability.

Warranty...MYSON offers a full ten year warranty on the heat exchanger and a full three year warranty on the fan motor.